

### LAMP MV6461A/QT264-6SRGW



#### Features

- Choice of various viewing angles
- Available on tape and reel.
- Reliable and robust
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm)

#### Description

- The264-6 lamps are made with AlGaInP or AlGaInP Deep-Red and Brilliant Yellow Green.
- Automatically insert able with radial lead insertion equipment.

#### Applications

- TV set
- Monitor
- Telephone
- Computer

## Device Selection Guide

PART NO.	Chip		Resin Color
	Materials	Emitted Color	
MV6461A/QT264-6SRGW	AlGaInP	Super Red	White Diffused
	AlGaInP	Super Yellow Green	

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating		Unit
Continuous Forward Current	IF	SDR	30	mA
		SYG	30	
Peak Forward Current (Duty 1/10 @ 1KHZ)	IFP	SDR	90	mA
		SYG	90	
Reverse Voltage	VR	5		
Power Dissipation	Pd	SDR	135	mW
		SYG	135	
ESD	ESD	2000		V
Operating Temperature	Topr	-55 ~ +100		°C
Storage Temperature	Tstg	-55 ~ +100		°C
Soldering Temperature	Tsol	260 °C for 5 sec.		

## Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol		Min.	Typ.	Max.	Unit	Condition
Forward Voltage	VF	SDR	-----	2.0	2.4	V	IF=20mA
		SYG	-----	2.0	2.4		
Reverse Current	IR	SDR	-----	-----	10	μA	VR=5V
		SYG	-----	-----	10		
Luminous Intensity	Iv	SDR	2.5	10	----	mcd	IF=20mA
		SYG	1.0	10	----		
Viewing Angle	2θ1/2	SDR	----	85	----	deg	IF=20mA
		SYG	----	85	----		
Peak Wavelength	λp	SDR	----	660	----	nm	IF=20mA
		SYG	----	575	----		
Dominant Wavelength	λd	SDR	----	650	----	nm	IF=20mA
		SYG	----	573	----		
Spectrum Radiation Bandwidth	Δλ	SDR	----	20	----	nm	IF=20mA
		SYG	----	20	----		

Note:

\*Measurement Uncertainty of Forward Voltage: ±0.1V


\*Measurement Uncertainty of Luminous Intensity: ±10%

\*Measurement Uncertainty of Dominant Wavelength ±1.0nm

\*Reverse Voltage(VR) Condition is IR test only The device is not designed for reverse operation

SDR

Typical Electro-Optical Characteristics Curves

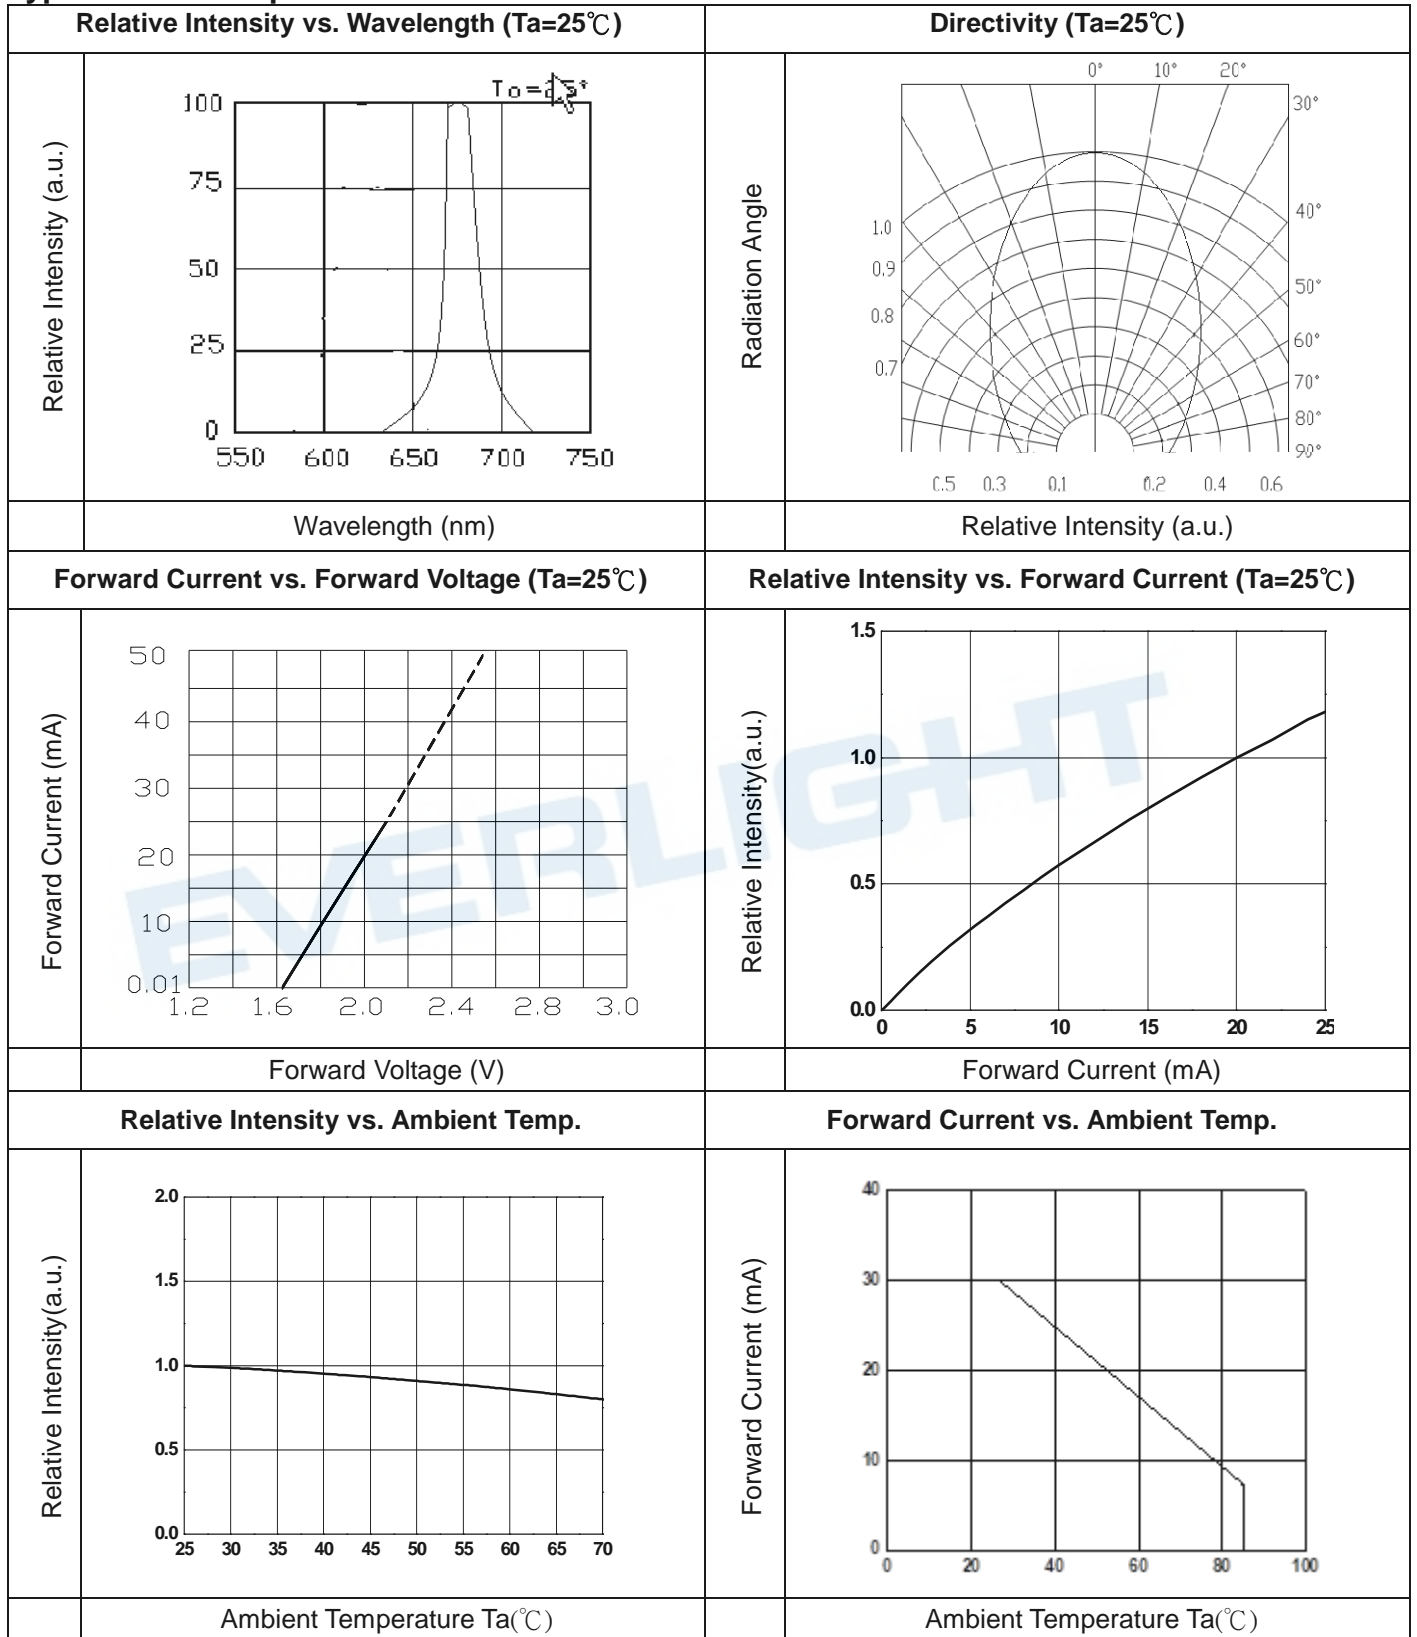


\*The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.

**SYG**

<p><b>Relative Intensity vs. Wavelength (Ta=25°C)</b></p>		<p><b>Directivity (Ta=25°C)</b></p>	
<p>Wavelength (nm)</p>		<p>Relative Intensity (a.u.)</p>	
<p><b>Forward Current vs. Forward Voltage (Ta=25°C)</b></p>		<p><b>Relative Intensity vs. Forward Current (Ta=25°C)</b></p>	
<p>Forward Voltage (V)</p>		<p>Forward Current (mA)</p>	
<p><b>Relative Intensity vs. Ambient Temp.</b></p>		<p><b>Forward Current vs. Ambient Temp.</b></p>	
<p>Relative Intensity(a.u.)</p>		<p>Forward Current (mA)</p>	
<p>Ambient Temperature Ta(°C)</p>		<p>Ambient Temperature Ta(°C)</p>	

\*The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.

## Package Dimension

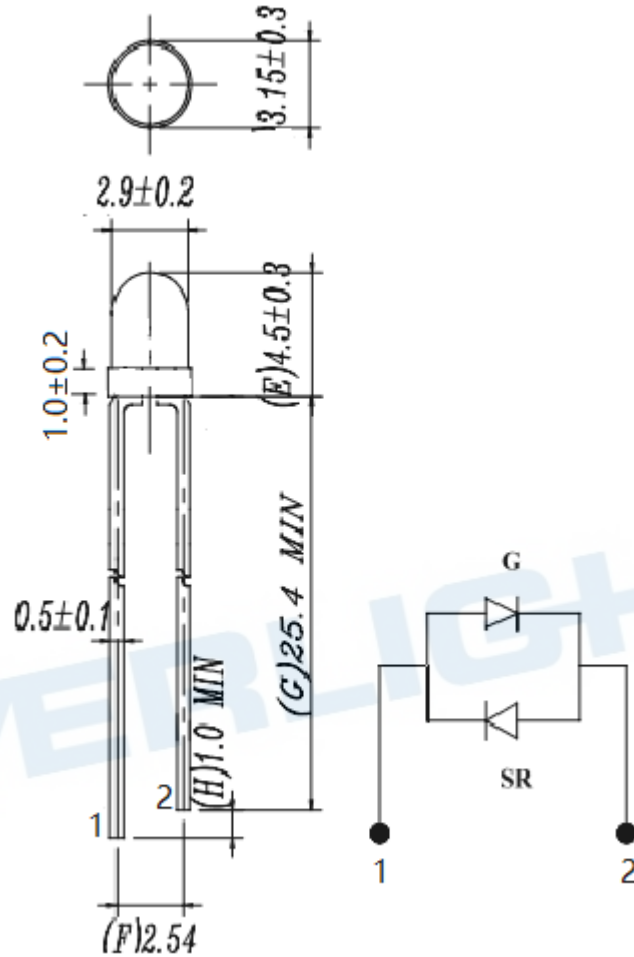


### Notes:

1. All dimensions are in millimeters, tolerance is  $\pm 0.25$ mm except being specified
2. Lead spacing is measured where the lead emerge from the package
3. Protruded resin under flange is 1.5 mm(0.059") Max LED.

## Moisture Resistant Packing Materials

### Label Explanation

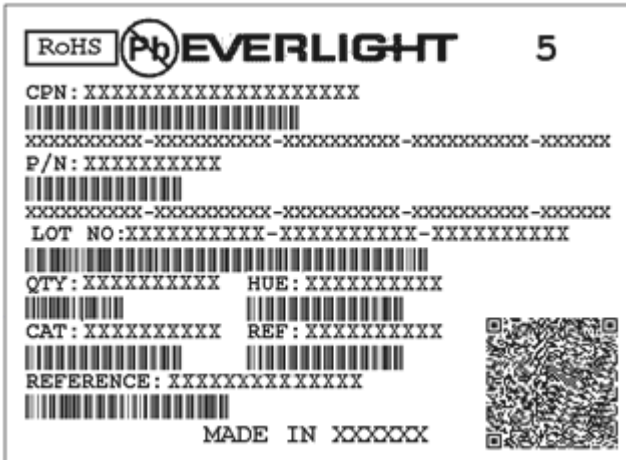

CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks of Luminous Intensity


HUE: Ranks of Dominant Wavelength

REF: Ranks of Forward Voltage


LOT No: Lot Number

### Packing Specification


■ Anti-electrostatic bag



■ Inner Carton



■ Outside Carton

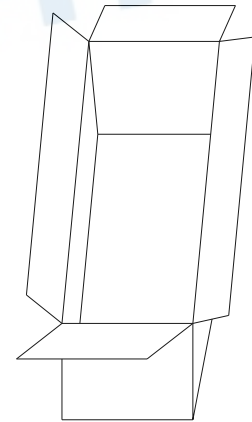

■ Packing Quantity

1. Min 200 To 1000 PCS/1 Bag, 4 Bags/1 Inner Carton
2. 10 Inner Cartons/1 Outside Carton

**Notes**

1. Lead Forming

- During lead formation, the leads should be bent at a point at least 3mm from the base of the epoxy bulb.
- Lead forming should be done before soldering.
- Avoid stressing the LED package during leads forming. The stress to the base may damage the LED's characteristics or it may break the LEDs.
- Cut the LED lead frames at room temperature. Cutting the lead frames at high temperatures may cause failure of the LEDs.
- When mounting the LEDs onto a PCB, the PCB holes must be aligned exactly with the lead position of the LED. If the LEDs are mounted with stress at the leads, it causes deterioration of the epoxy resin and this will degrade the LEDs.
- Over-current-proof  
Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

2. Storage


- The LEDs should be stored at 30°C or less and 70%RH or less after being shipped from Everlight and the storage life limits are 3 months. If the LEDs are stored for 3 months or more, they can be stored for a year in a sealed container with a nitrogen atmosphere and moisture absorbent material. After opening the LEDs should be used up within 24 hours
- Please avoid rapid transitions in ambient temperature, especially, in high humidity environments where condensation can occur.

3. Soldering

- Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to epoxy bulb, and soldering beyond the base of the tie bar is recommended.
- Recommended soldering conditions:

Hand Soldering		DIP Soldering	
Temp. at tip of iron	300°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)
Soldering time	3 sec Max.	Bath temp. & time	260 Max., 5 sec Max
Distance	3mm Min.(From solder joint to epoxy bulb)	Distance	3mm Min. (From solder joint to epoxy bulb)

- Recommended soldering profile

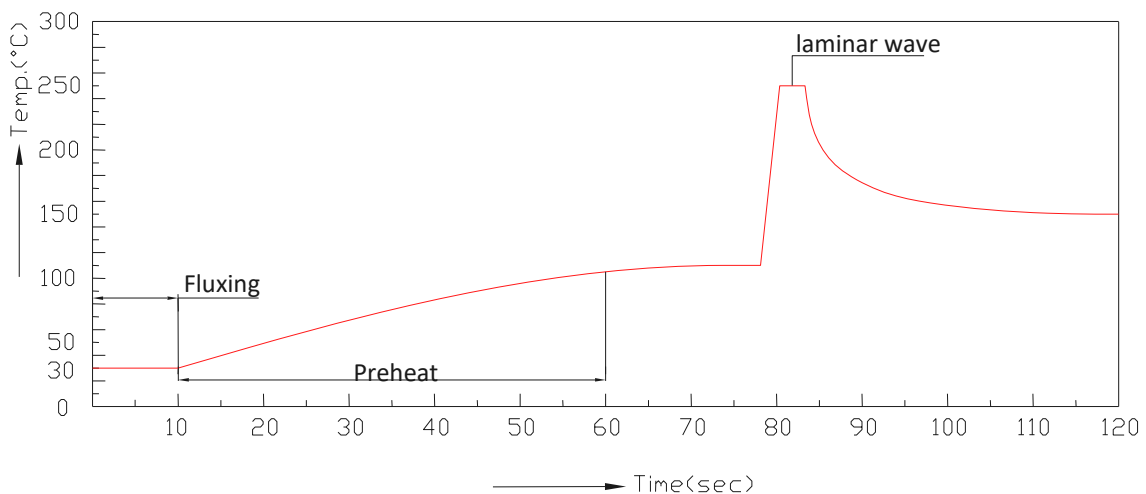

- Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.
- Dip and hand soldering should not be done more than one time

- After soldering the LEDs, the epoxy bulb should be protected from mechanical shock or vibration until the LEDs return to room temperature.
  - A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature.
  - Although the recommended soldering conditions are specified in the above table, dip or hand soldering at the lowest possible temperature is desirable for the LEDs.
  
  - Wave soldering parameter must be set and maintain according to recommended temperature and dwell time in the solder wave.
4. Cleaning
- When necessary, cleaning should occur only with isopropyl alcohol at room temperature for a duration of no more than one minute. Dry at room temperature before use.
  - Do not clean the LEDs by the ultrasonic. When it is absolutely necessary, the influence of ultrasonic cleaning on the LEDs depends on factors such as ultrasonic power and the assembled condition. Ultrasonic cleaning shall be pre-qualified to ensure this will not cause damage to the LED
5. Heat Management
- Heat management of LEDs must be taken into consideration during the design stage of LED application. The current should be de-rated appropriately by referring to the de-rating curve found in each product specification.
  - The temperature surrounding the LED in the application should be controlled. Please refer to the data sheet de-rating curve.
6. ESD (Electrostatic Discharge)
- The products are sensitive to static electricity or surge voltage. ESD can damage a die and its reliability. When handling the products, the following measures against electrostatic discharge are strongly recommended:
    - Eliminating the charge
      - Grounded wrist strap, ESD footwear, clothes, and floors
      - Grounded workstation equipment and tools
      - ESD table/shelf mat made of conductive materials
    - Proper grounding is required for all devices, equipment, and machinery used in product assembly. Surge protection should be considered when designing of commercial products.
    - If tools or equipment contain insulating materials such as glass or plastic, the following measures against electrostatic discharge are strongly recommended:
      - Dissipating static charge with conductive materials
      - Preventing charge generation with moisture
      - Neutralizing the charge with ionizers
7. Directions for use
- The LEDs should be operated with forward bias. The driving circuit must be designed so that the LEDs are not subjected to forward or reverse voltage while it is off. If reverse voltage is continuously applied to the LEDs, it may cause migration resulting in LED damage.

## DISCLAIMER

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.

EVERLIGHT