
# EVERLIGHT AMERICAS

# **DATASHEET**

# Display ■ Through-hole EADDM117AA2



#### **Features**

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.
- Pb free and RoHS compliant.

#### Description

- •The EADDM117AA2 is a pattern display designed for viewing distances up to 7 meters.
- The display provides excellent reliability in bright ambient light.
- The device is made with white segments and black surface.

# **Applications**

- · Home appliances
- · Instrument panels
- · Digital readout displays



#### **Device Selection Guide**

Chip Materials	Emitted Color	Resin Color
AlGaInP	Brilliant Orange	White Diffusion

# Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_{R}$	5	V
Forward Current	I <sub>F</sub>	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I <sub>FP</sub>	60	mA
Power Dissipation	Pd	60	mW
Operating Temperature	$T_{opr}$	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	$T_{stg}$	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature (Soldering time ≤ 5 seconds)	$T_{sol}$	260	$^{\circ}\! \mathbb{C}$

# **Electro-Optical Characteristics (Ta=25℃)**


Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity <sup>*1</sup>	lv	30.0	67.0		mcd	I <sub>F</sub> =10mA
Peak Wavelength	λр		611		nm	I <sub>F</sub> =20mA
Dominant Wavelength	λd		605		nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	Δλ		17		nm	I <sub>F</sub> =20mA
Forward Voltage	$V_{F}$		2.0	2.4	V	I <sub>F</sub> =20mA
Reverse Current	$I_R$			100	μΑ	$V_R=5V$


#### Note:


- 1. Tolerance of Luminous Intensity:  $\pm$  10 %
- 2. Tolerance of Forward Voltage: ± 0.1V



# **Typical Electro-Optical Characteristics Curves**

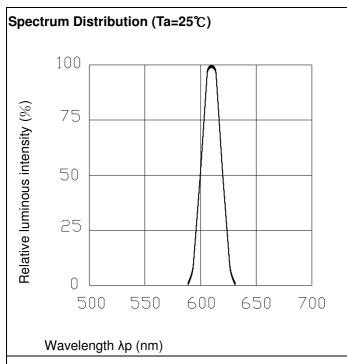


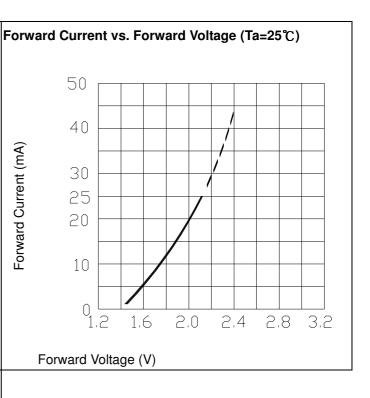






## **Package Dimension & Internal Circuit Diagram**

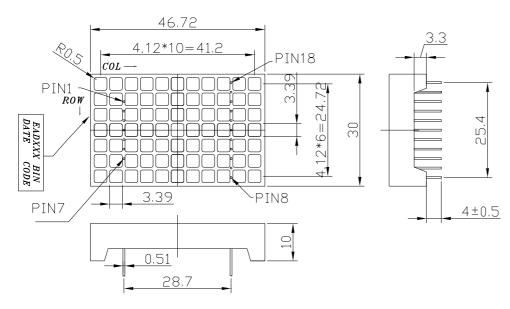

ANODE COLUMN CATHODE ROW CATHODE ROW CATHODE ROW 3 CATHODEROWROWCATHODEROW 5 CATHODECATHODEROW 6 CATHODE ROW ANODE COLUMN 8 ANODE COLUMN ANODE COLUMN ANODE COLUMN ANODE13 ANODE COLUMN 14 ANODE COLUMN 5 15 ANODE COLUMN ANODE17 ANODE COLUMN 18 ANODE COLUMN 1

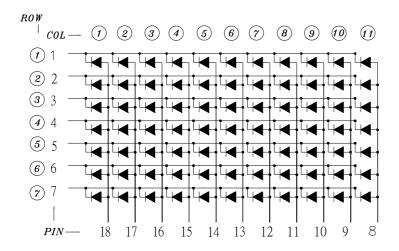

Note: Tolerances unless mentioned ±0.25mm. Unit = mm




# **Packing Materials**

#### **Label Explanation**



- · CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- · CAT: Luminous Intensity Rank
- HUE: ReferenceREF: ReferenceLOT No: Lot Number
- · REFERENCE: Volume Label code

#### **Packing Process**

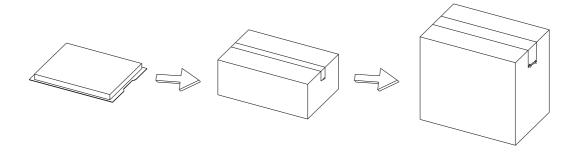

32 PCS/Plate 5 Plates/Box 2 Boxes/Carton



### **Application Restrictions**

- 1. Specification described in this document. Above specification may be changed without notice. Everlight Americas will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. Everlight Americas assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of Everlight Americas Corporation. Please don't reproduce or cause anyone to reproduce them without Everlight Americas's consent.
- 4. ESD (Electrostatic Discharge)
  - The products are sensitive to static electricity or surge voltage. ESD can damage a die and its reliability. When handling the products, the following measures against electrostatic discharge are strongly recommended:

Eliminating the charge

Grounded wrist strap, ESD footwear, clothes, and floors

Grounded workstation equipment and tools

ESD table/shelf mat made of conductive materials

- Proper grounding is required for all devices, equipment, and machinery used in product assembly.Surge protection should be considered when designing of commercial products.
- If tools or equipment contain insulating materials such as glass or plastic,

the following measures against electrostatic discharge are strongly recommended:

Dissipating static charge with conductive materials

Preventing charge generation with moisture

Neutralizing the charge with ionizers

5. The LEDs should be operated with forward bias. The driving circuit must be designed so that the LEDs are not subjected to forward or reverse voltage while it is off. If reverse voltage is continuously applied to the LEDs, it may cause migration resulting in LED damage.