


## 4 PIN SOP RANDOM-PHASE TRIAC PHOTOCOUPLER ELM302X, ELM305X Series



Schematic



Pin Configuration

1. Anode
2. Cathode
3. Terminal
4. Terminal

### Features:

- Halogens free.  
(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm)
- Peak breakdown voltage
  - 400V: ELM302X
  - 600V: ELM305X
- High isolation voltage between input and output (Viso=3750 V rms )
- Compact dual-in-line package
- Compliance with EU REACH.
- Pb free and RoHS compliant.
- UL and cUL approved
- VDE approved
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CQC approved

### Description

The ELM302X series and ELM305X series are optically isolated triac driver devices. These devices contain a GaAs infrared emitting diode and a light activated silicon bilateral switch, which functions like a triac.

They are designed for interfacing between electronic controls and power triacs to control resistive and inductive loads for 115 to 240 VAC operations.

### Applications

- Solenoid/valve controls
- Lamp ballasts
- Static AC power switch
- Interfacing microprocessors to 115 to 240Vac peripherals
- Incandescent lamp dimmers
- Temperature controls
- Motor controls

### Absolute Maximum Ratings (Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	30	mA
	Reverse voltage	V <sub>R</sub>	6	V
	Power Dissipation	P <sub>D</sub>	50	mW
Output	Off-state Output Terminal Voltage	ELM302X ELM305X	400 600	V
	R.M.S. On-state current	I <sub>T(RMS)</sub>	70	mA
	Peak Repetitive Surge Current (pw≤100μs, 120pps)	I <sub>TP</sub>	2	A
	Peak Non-repetitive Surge Current (f=60Hz, one cycle)	I <sub>TSM</sub>	1	A
	Power dissipation	P <sub>C</sub>	300	mW
	Total power dissipation	P <sub>TOT</sub>	250	mW
	Isolation voltage *1	V <sub>ISO</sub>	3750	V <sub>rms</sub>
Operating temperature	T <sub>OPR</sub>	-40~+100	°C	
Storage temperature	T <sub>STG</sub>	-55~+125	°C	
Soldering Temperature*2	T <sub>SOL</sub>	260	°C	

#### Notes:

\*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

\*2 For 10 seconds

### Recommended Operating Conditions (Note)

Please use under recommended operating conditions to obtain expected characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Forward current	ELM30X2	15	20	25	mA
	ELM30X3	7	10	20	mA
	ELM30X4	5	7	15	mA
AC mains voltage	V <sub>AC</sub>	-	-	240	V
Operating temperature	T <sub>OPR</sub>	-25	-	85	°C

#### Notes:

The recommended operating conditions are given as a design guide necessary to obtain the intended performance of the device. Each parameter is an independent value. When creating a system design using this device, the electrical characteristics specified in this data sheet should also be considered.

**Electro-Optical Characteristics (Ta=25°C unless specified otherwise)**

**Input**

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Forward Voltage	V <sub>F</sub>	-	1.2	1.5	V	I <sub>F</sub> = 10mA
Reverse Leakage current	I <sub>R</sub>	-	-	10	μA	V <sub>R</sub> = 6V

Note: Reverse Voltage(V<sub>R</sub>) Condition is applied to I<sub>R</sub> test only The device is not designed for reverse operation

**Output**

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Peak Blocking Current	I <sub>DRM</sub>	-	-	500	nA	V <sub>DRM</sub> = Rated V <sub>DRM</sub> I <sub>F</sub> = 0mA
Peak On-state Voltage	V <sub>TM</sub>	-	-	2.5	V	I <sub>TM</sub> =100mA peak, I <sub>F</sub> =Rated I <sub>FT</sub>
Critical Rate of Rise off-state Voltage	ELM302X ELM305X dv/dt	600	-	-	V/μs	V <sub>PEAK</sub> = 0.636×Rated V <sub>DRM</sub> , I <sub>F</sub> = 0mA (Fig.10)

**Transfer Characteristics**

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
LED Trigger Current	I <sub>FT</sub>	3022	-	10	mA	Main terminal Voltage=3V <sup>*2</sup>
		3052	-	-		
		3023	-	5		
		3053	-	-		
Holding Current	I <sub>H</sub>	3024	-	3	μA	
		3054	-	250		

Notes:

\*2. All devices are guaranteed to trigger at an I<sub>F</sub> value over than max I<sub>FT</sub>

Typical Electro-Optical Characteristics Curves

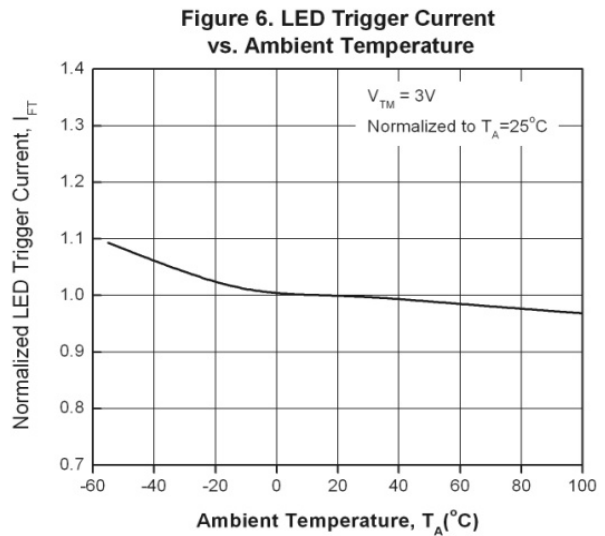
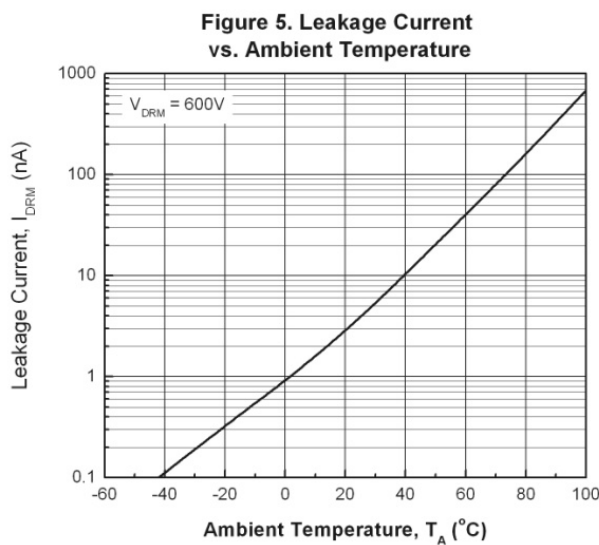
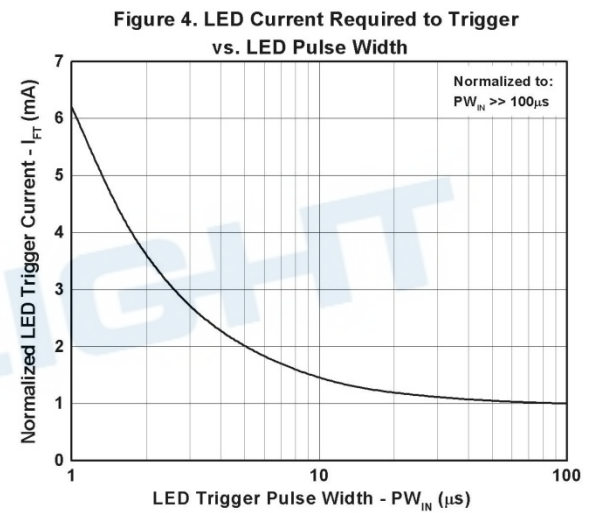
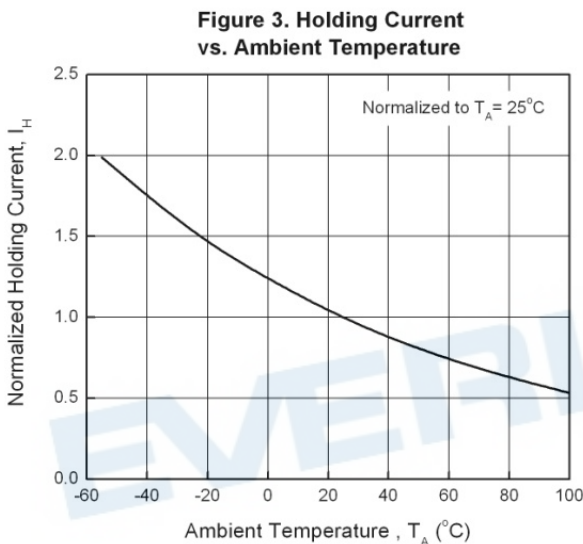
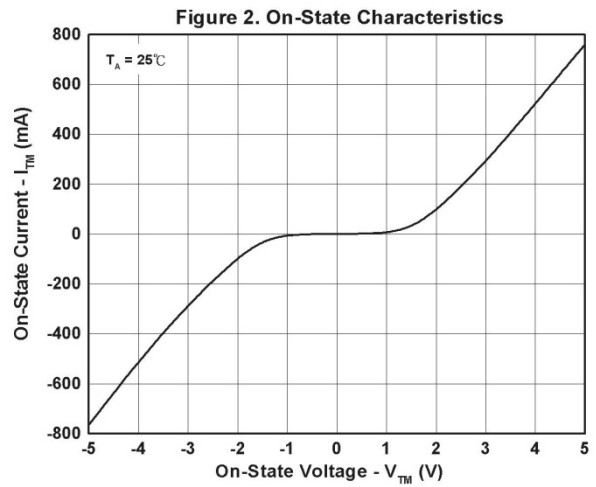
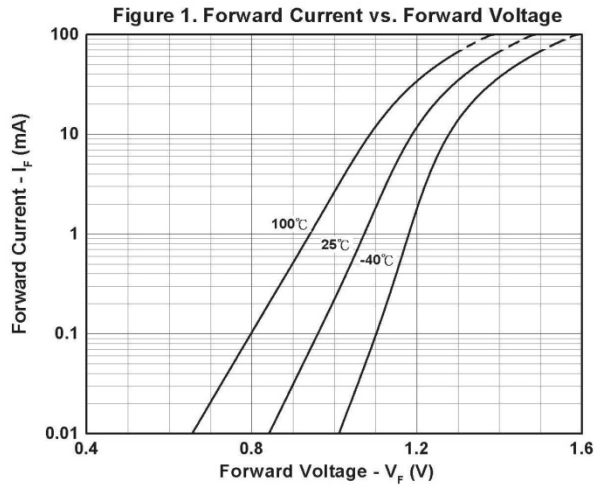


Figure 7. Off-State Output Terminal Voltage vs. Ambient Temperature

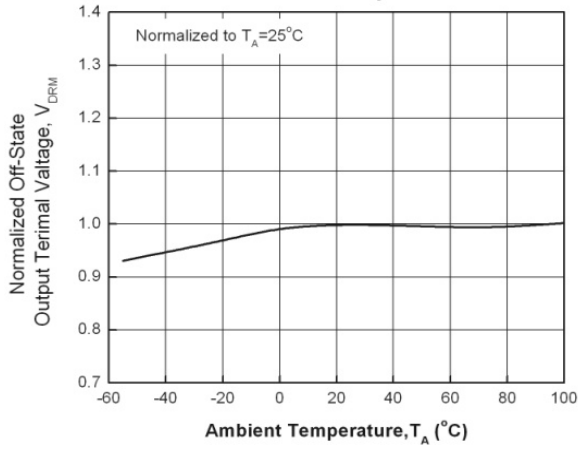


Fig 8.  $I_F$  Maximum rating vs Temperature



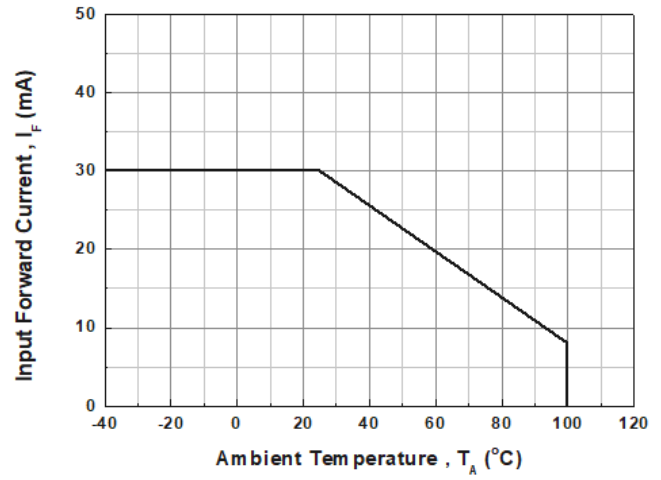


Fig 9. On-state Current vs Temperature

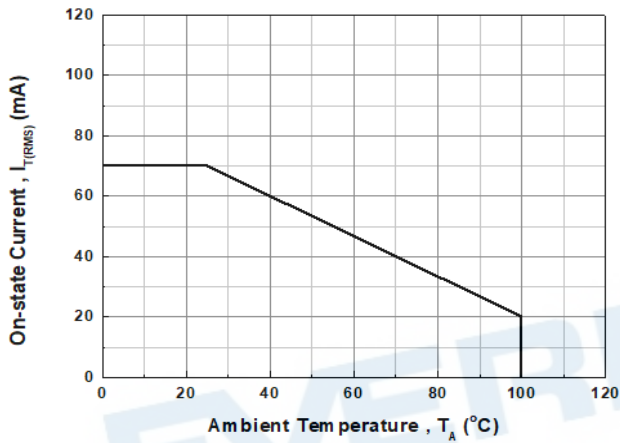

Note: The graphs shown in this datasheet are representing typical data only and do not show guaranteed values

Figure 10. Static dv/dt Test Circuit & Waveform

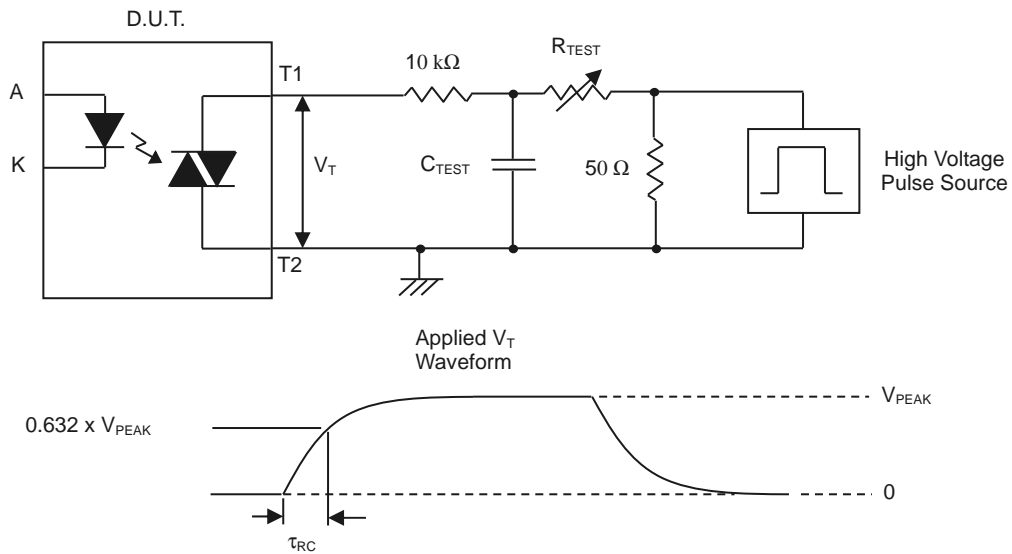

### Measurement Method

The high voltage pulse is set to the required  $V_{PEAK}$  value and applied to the D.U.T. output side through the RC circuit above. LED current is not applied. The waveform  $V_T$  is monitored using a x100 scope probe. By varying  $R_{TEST}$ , the dv/dt (slope) is increased, until the D.U.T. is observed to trigger (waveform collapses). The dv/dt is then decreased until the D.U.T. stops triggering. At this point,  $\tau_{RC}$  is recorded and the dv/dt calculated.

$$dv/dt = \frac{0.632 \times V_{PEAK}}{\tau_{RC}}$$

## Order Information

### Part Number


**ELM302X(Z)-V**  
or **ELM305X(Z)-V**

### Note


- X = Part No. (2 ,3 or 4 )
- Z = Tape and reel option (TA, TB or none).
- V = VDE safety approved (optional)

Option	Description	Packing quantity
None	Standard	100 units per tube
None	Standard + VDE safety optional	100 units per tube
(TA)	TA tape & reel option	3500 units per reel
(TB)	TB tape & reel option	3500 units per reel
(TA)-V	TA tape & reel option + VDE safety optional	3500 units per reel
(TB)-V	TB tape & reel option + VDE safety optional	3500 units per reel

Package Dimension (Dimensions in mm)

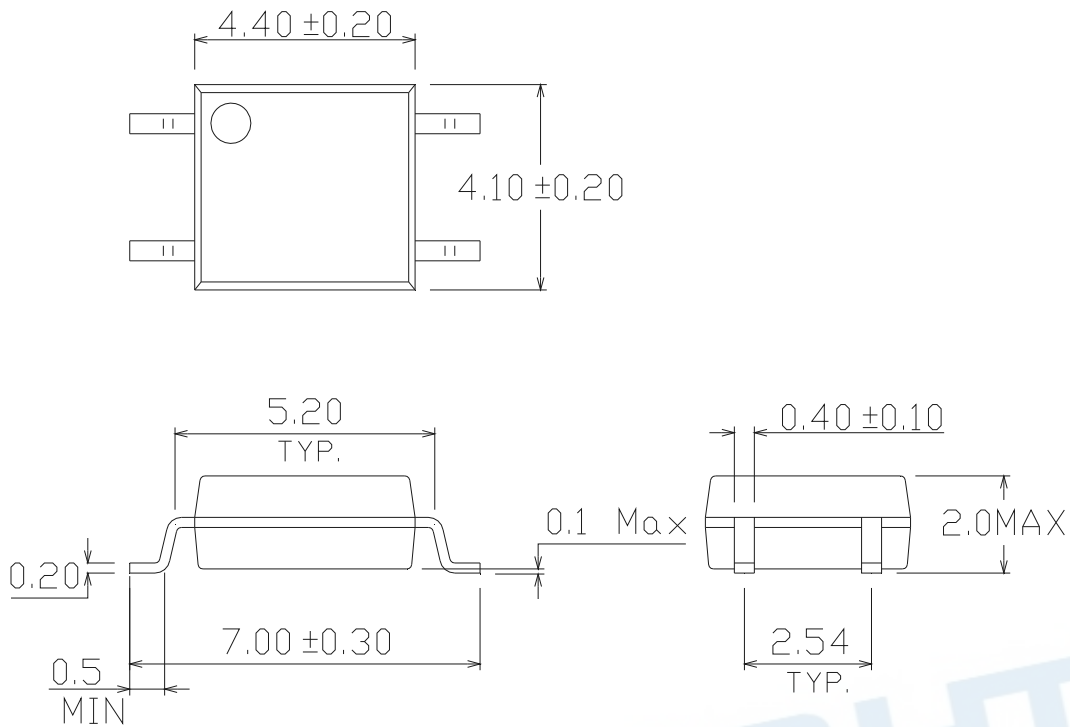

Recommended pad layout for surface mount leadform

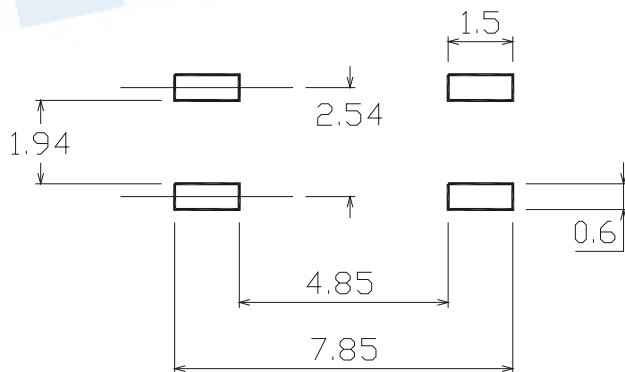

## Device Marking



### Notes

T	denotes Factory No code : made in China T : made in Taiwan
EL	denotes Everlight
M3054	denotes Device Number
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE safety option (optional)

EVERLIGHT

Label form

Diagram 1 shows a label layout for the EL817M(C)-VG component. It includes the Everlight logo with a Pb-free symbol, a date '11' (month), and various identification fields:
 

- Customer Part No: CPN: XXXXXXXXXXXX 測試區
- Customer Part Name: P/N: XXXXXXXXXXXX
- Customer Part No: EL817M(C)-VG
- Production Week: D/C: YWWX, CAT: X, QTY: 000000
- Production Lot No: LOT NO: Y151130XXXXXXXXXX
- Label Reference: REFERENCE: BTPyyMMddXXXXX
- Origin: MADE IN XXXXXX

 Compliance logos for RoHS, CEC, and UL are also present. A QR code is located on the right side.


or

Diagram 2 shows an alternative label layout. It features a RoHS label at the top left, followed by the Everlight logo with a Pb-free symbol and a date '5' (month). The fields include:
 


- Customer Part No: CPN: XXXXXXXXXXXX 測試區
- Customer Part Name: XXXXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX
- Customer Part No: P/N: XXXXXXXXXXXX
- Customer Part Name: XXXXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX
- Production Lot No: LOT NO: Y150516XXX-XXXXXXXXXX-XXXXXXXXXX
- Packaging Quantity: QTY: 0123456789 HUE: XXXXXXXXXXXX
- CTR Level: CAT: XXXXXXXXXXXX REF: XXXXXXXXXXXX
- Label Reference: REFERENCE: BTPYMMDDXXXXX
- MSL Level: MSL-XX, Origin: MADE IN XXXXXX

 Compliance logos for CEC, UL, and RoHS are shown. A QR code is also present.



TUBE Dimension

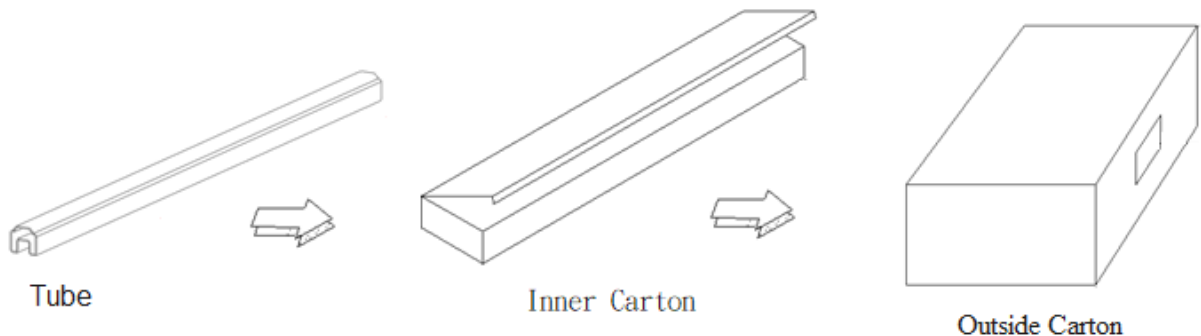


### Reel Dimension

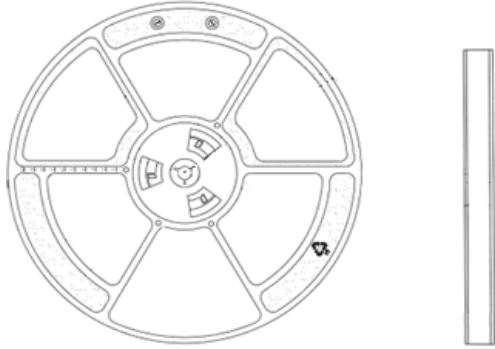


### Moisture Resistant Packaging

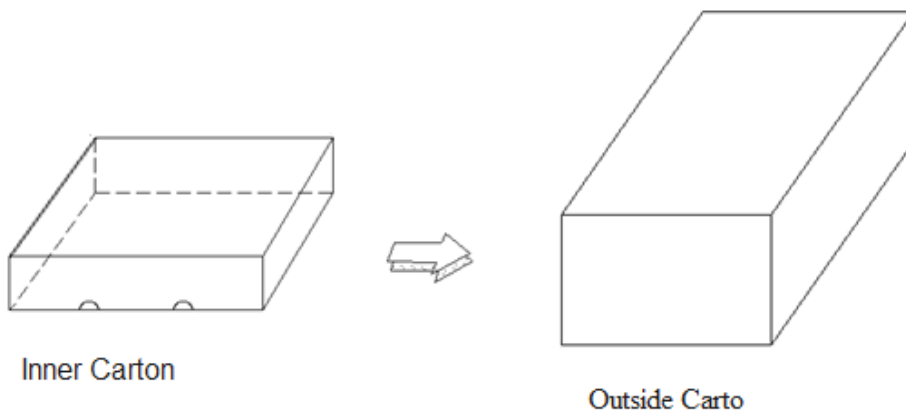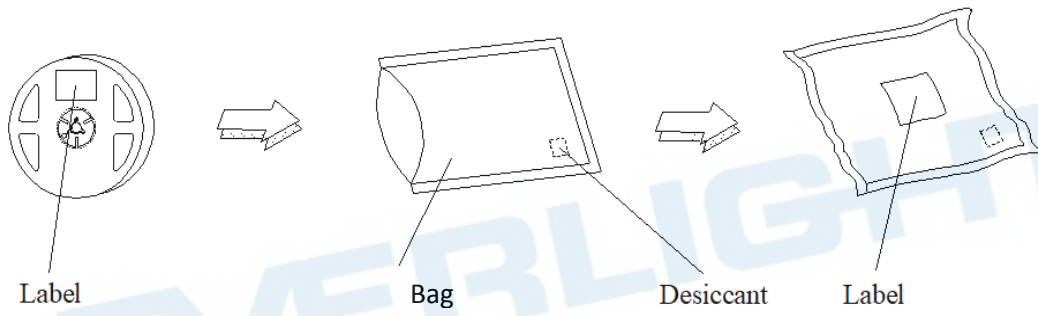

**Tape & Reel Packing Specifications**

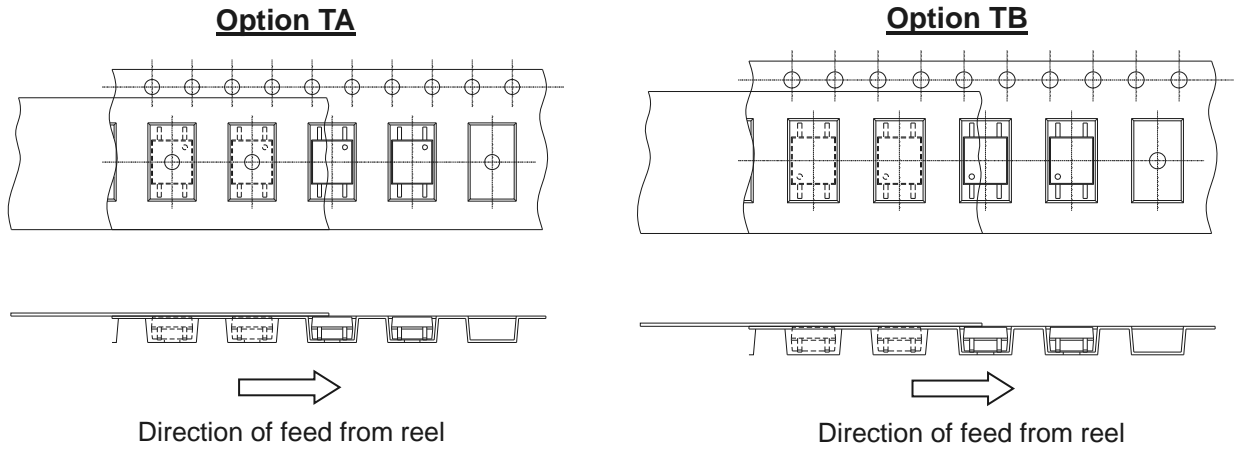

**Tape dimensions**

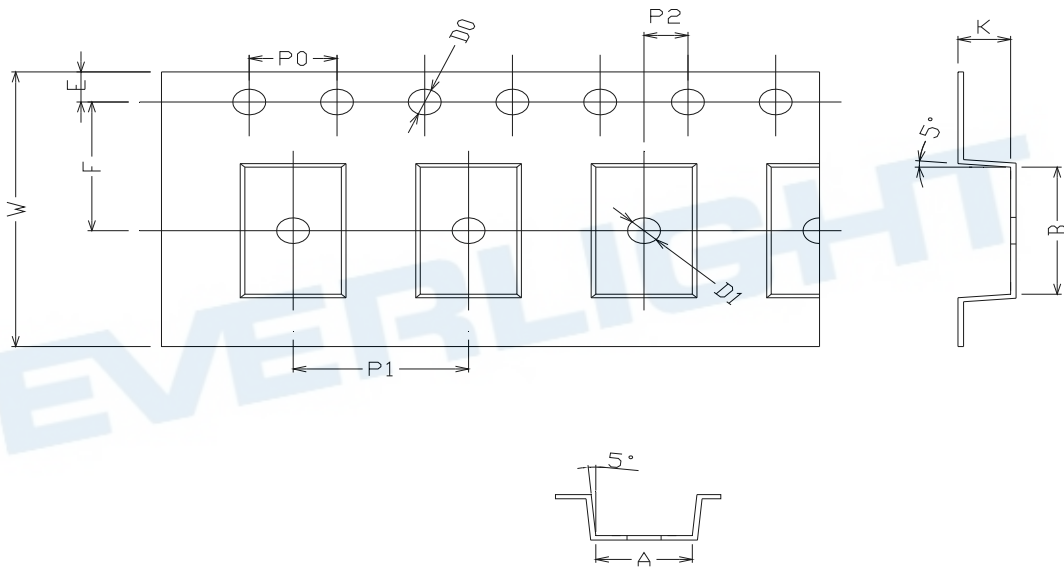


Dimension No.	A	B	Do	D1	E	F
Dimension (mm)	4.4 ± 0.1	7.4 ± 0.1	1.5 + 0.1/-0	1.5 ± 0.1	1.75 ± 0.1	7.5 ± 0.1

Dimension No.	Po	P1	P2	t	W	K
Dimension (mm)	4.0 ± 0.15	8.0 ± 0.1	2.0 ± 0.1	0.25 ± 0.03	16.0 ± 0.2	2.4 ± 0.1

## Precautions for Use

### 1. Soldering Condition

#### 1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

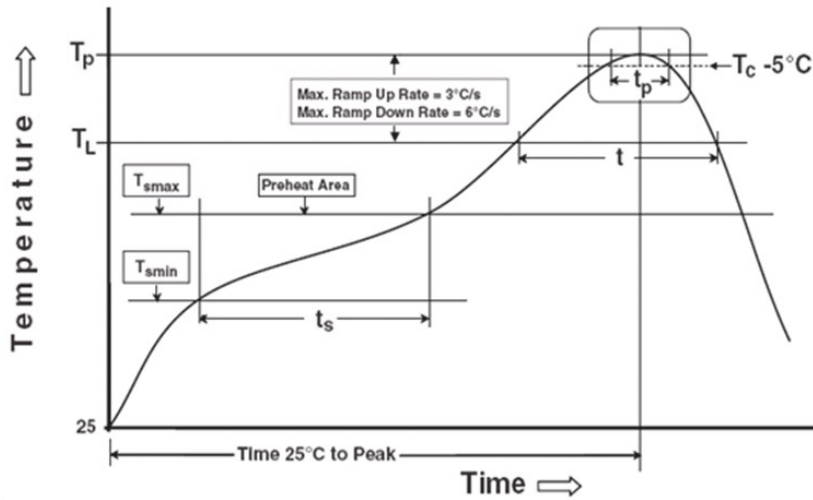

Note:

Reference: IPC/JEDEC J-STD-020D

#### Preheat

Temperature min ( $T_{smin}$ )	150 °C
Temperature max ( $T_{smax}$ )	200°C
Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	60-120 seconds
Average ramp-up rate ( $T_{smax}$ to $T_p$ )	3 °C/second max

#### Other

Liquidus Temperature ( $T_L$ )	217 °C
Time above Liquidus Temperature ( $t_L$ )	60-100 sec
Peak Temperature ( $T_P$ )	260°C
Time within 5 °C of Actual Peak Temperature: $T_P - 5^\circ\text{C}$	30 s
Ramp- Down Rate from Peak Temperature	6°C /second max.
Time 25°C to peak temperature	8 minutes max.
Reflow times	3 times

### EN-60747-5-5 Insulation Related Characteristics

Description	Symbol	Rating	Unit
Climatic Classification	-	55/110/21	-
Pollution Degree	-	2	-
Maximum Working Insulation Voltage	$V_{IORM}$	707	$V_{peak}$
Input to Output Test Voltage, Method A $V_{IORM} \times 1.6 = V_{PR}$ , Type and Sample Test, $t_m = 10s$ , Partial Discharge < 5 pC	$V_{PR}$	1131	$V_{peak}$
Input to Output Test Voltage, Method B $V_{IORM} \times 1.875 = V_{PR}$ , 100% Production Test with $t_m = 1s$ , Partial Discharge < 5 pC	$V_{PR}$	1325	$V_{peak}$
Highest Allowable Overvoltage (Transient Overvoltage, $t_{ini} = 60s$ )	$V_{IOTM}$	4800	$V_{peak}$
Safety Limiting Values (max. allowable ratings in case of fault, also refer to thermal derating curve)			
Temperature	$T_s$	150	°C
Input Current	$I_{S,INPUT}$	200	mA
Output Power	$P_{S,OUTPUT}$	350	mW
Insulation Resistance at $T_s$ , $V_{IO} = 500 V$	$R_s$	$10^9$	$\Omega$

### Insulation and Safety Related Specification

Description	Symbol	Rating	Unit
Minimum Creepage Distance	Cr	5	mm
Minimum Clearance	Cl	5	mm
Minimum Insulation Distance	$T_i$	0.4	mm
Comparative Tracking Index	CTI	175	-

## Precautions for General Storage

- Avoid storage locations where devices may be exposed to moisture or direct sunlight.
- Follow the precautions printed on the packing label of the device for transportation and storage.
- Keep the storage location temperature and humidity within a range of 5°C to 35°C and 20 % to 60 %, respectively.
- Do not store the products in locations with poisonous gases (especially corrosive gases) or in dusty conditions.
- Store the products in locations with minimal temperature fluctuations. Rapid temperature changes during storage can cause condensation, resulting in lead oxidation or corrosion, which will deteriorate the solderability of the leads.
- When restoring devices after removal from their packing, use anti-static containers.
- Do not allow loads to be applied directly to devices while they are in storage.
- If devices have been stored for more than two years under normal storage conditions, it is recommended that you check the leads for ease of soldering prior to use.

EVERLIGHT

## DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.