

Technical Data Sheet

Bi-Color (Multi-color) Top Views LEDs

67-22/R6SG6SC-B11/2T

Features

- P-LCC-4 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version



Descriptions

- The 67-22 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.



Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.


Device Selection Guide

Chip			Lens Color
Type	Material	Emitted Color	
R6S	AlGaInP	Brilliant Red	Water Clear
G6S	AlGaInP	Brilliant Yellow Green	

Package Dimensions

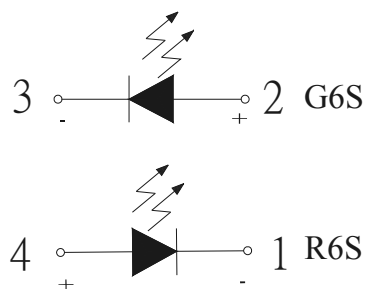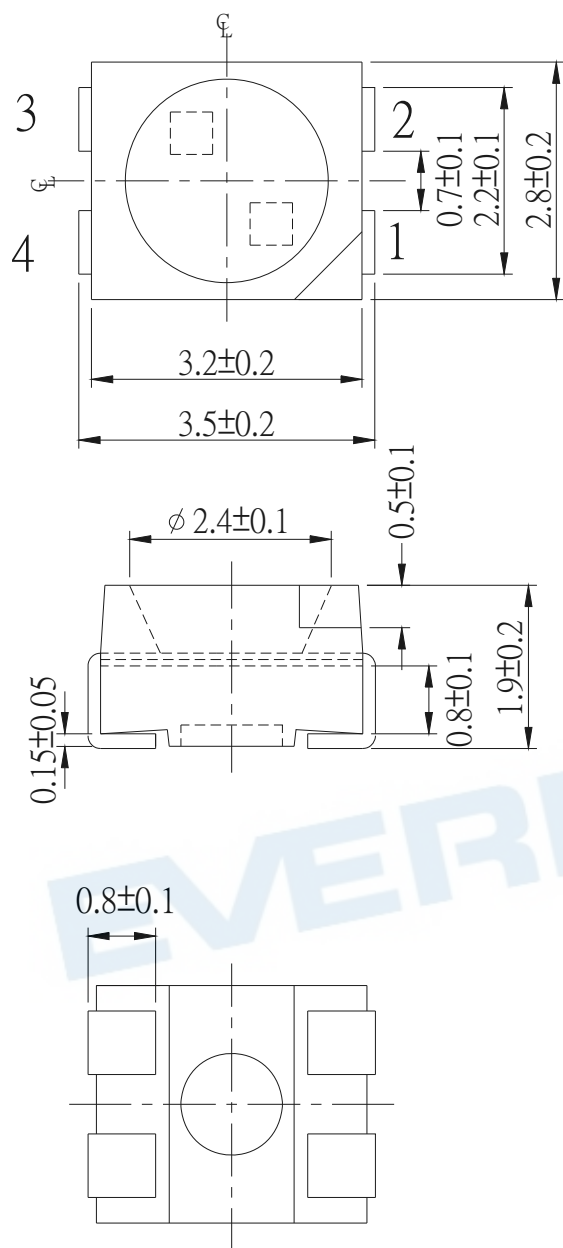

Polarity

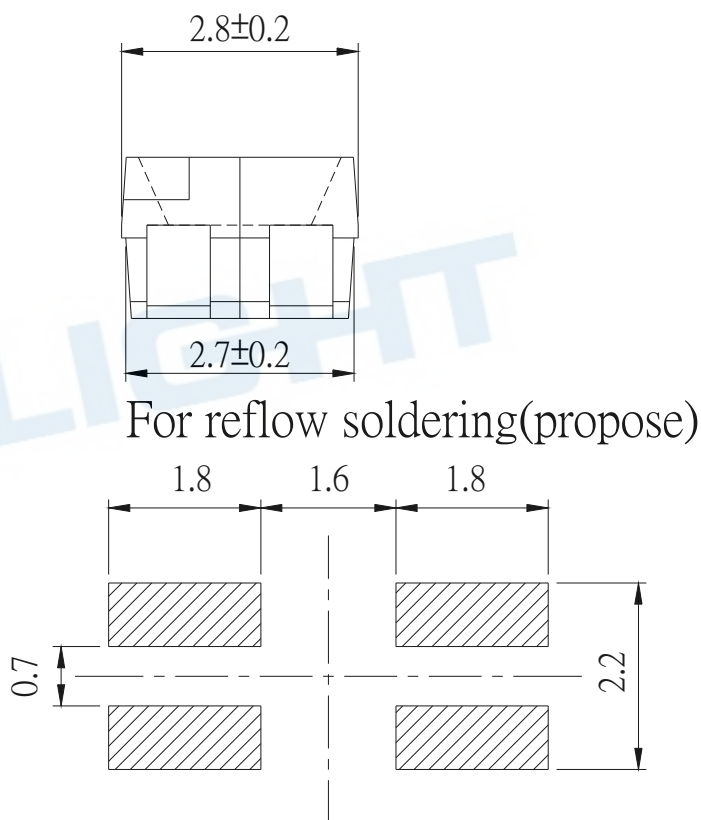

- Notes:** 1.All dimensions are in millimeters.
2.Tolerances unspecified are $\pm 0.1\text{mm}$.

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol		Rating	Unit
Reverse Voltage	V_R		5	V
Forward Current	I_F	R6S	50	mA
		G6S	40	
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	R6S	100	mA
		G6S	80	
Power Dissipation	P_d	R6S	120	mW
		G6S	100	
Electrostatic Discharge(HBM)	ESD	R6S	2000	V
		G6S	2000	
Operating Temperature	T_{opr}		-40 ~ +85	℃
Storage Temperature	T_{stg}		-40 ~ +90	℃
Soldering Temperature	T_{sol}		Reflow Soldering : 260 ℃ for 10 sec Hand Soldering : 350 ℃ for 3 sec.	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol		Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	R6S	57	-----	140	mcd	I _F =20mA
		G6S	36	-----	90		
Peak Wavelength	λ _p	R6S	-----	632	-----	nm	
		G6S	-----	575	-----		
Dominant Wavelength	λ _d	R6S	617.5	-----	633.5	nm	
		G6S	567.5	-----	575.5		
Spectrum Radiation Bandwidth	△λ	R6S	-----	20	-----	nm	
		G6S	-----	18	-----		
Forward Voltage	V _F	R6S	1.75	-----	2.35	V	
		G6S	1.75	-----	2.35		
Viewing Angle	2 θ 1/2		-----	120	-----	deg	
Reverse Current	I _R		-----	-----	10	μ A	V _R =5V

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1.0nm
- 3.Tolerance of Forward Voltage ±0.1V

Bin Range Of Luminous Intensity

Chip	Bin Code	Min.	Max.	Unit	Condition
R6S	P2	57.0	72.0	mcd	I _F =20mA
	Q1	72.0	90.0		
	Q2	90.0	112		
	R1	112	140		
G6S	N2	36.0	45.0		
	P1	45.0	57.0		
	P2	57.0	72.0		
	Q1	72.0	90.0		

Bin Range Of Dominant Wavelength

Chip	Bin Code	Min.	Max.	Unit	Condition
R6S	E4	617.5	621.5	nm	I _F =20mA
	E5	621.5	625.5		
	E6	625.5	629.5		
	E7	629.5	633.5		
G6S	C15	567.5	569.5		
	C16	569.5	571.5		
	C17	571.5	573.5		
	C18	573.5	575.5		





Bin Range Of Forward Voltage

Chip	Bin Code	Min.	Max.	Unit	Condition
R6S	0	1.75	1.95	V	I _F =20mA
	1	1.95	2.15		
	2	2.15	2.35		
G6S	0	1.75	1.95		
	1	1.95	2.15		
	2	2.15	2.35		



Notes:

- 1.Tolerance of Luminous Intensity $\pm 10\%$**
- 2.Tolerance of Dominant Wavelength $\pm 1.0\text{nm}$**
- 3.Tolerance of Forward Voltage $\pm 0.1\text{V}$**







Typical Electro-Optical Characteristics Curves (R6S)

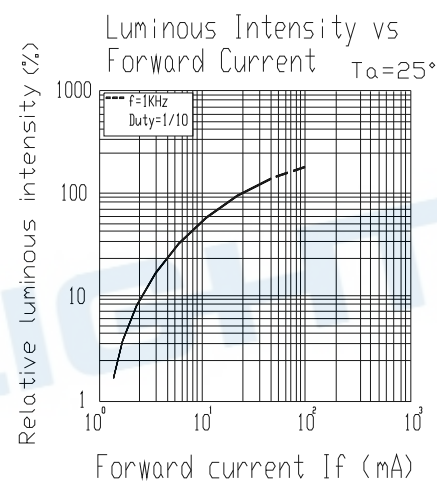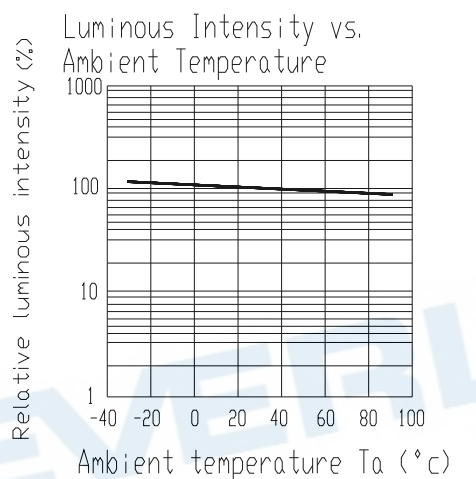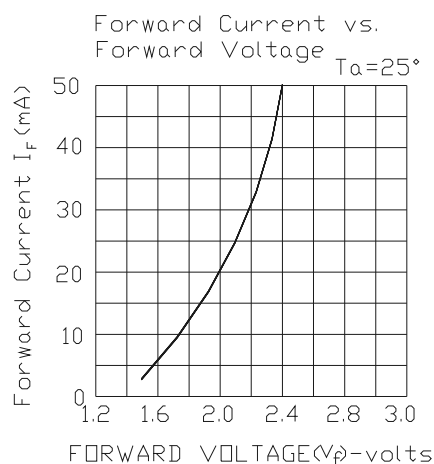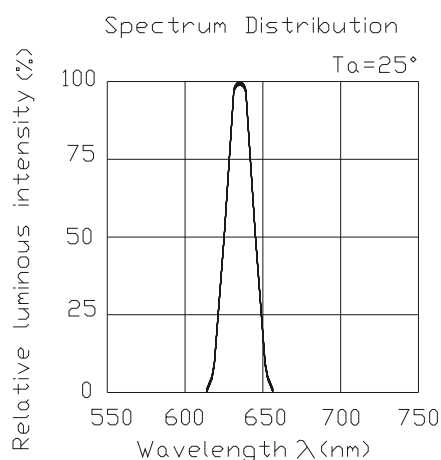

Forward Current Derating Curve

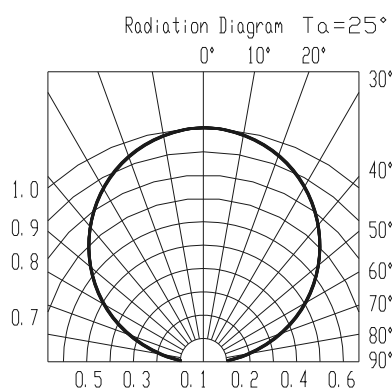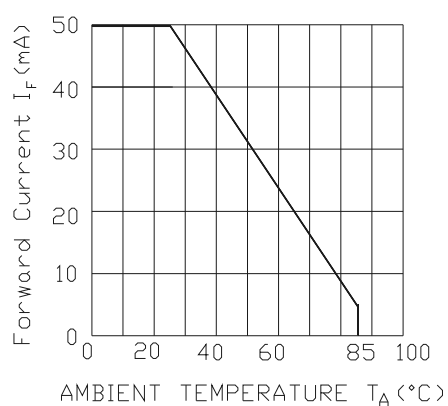

Typical Electro-Optical Characteristics Curves (G6S)

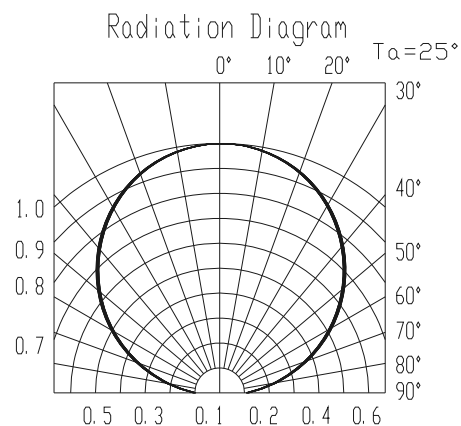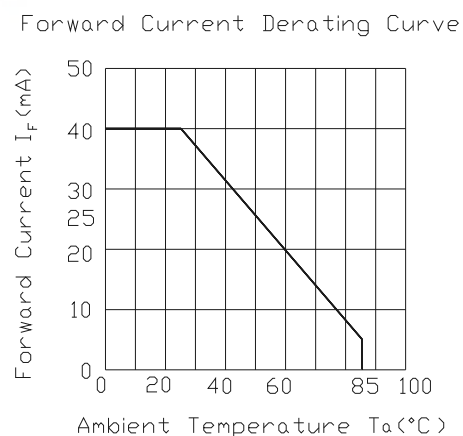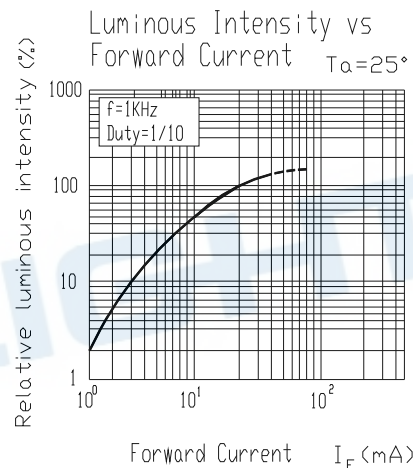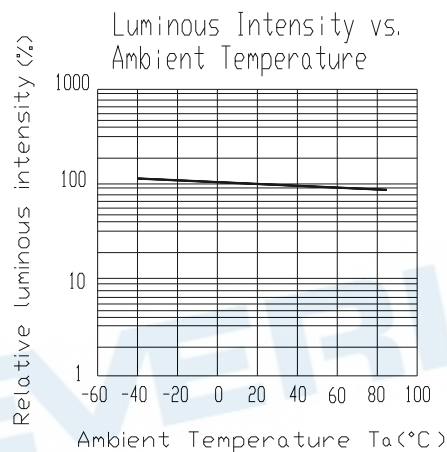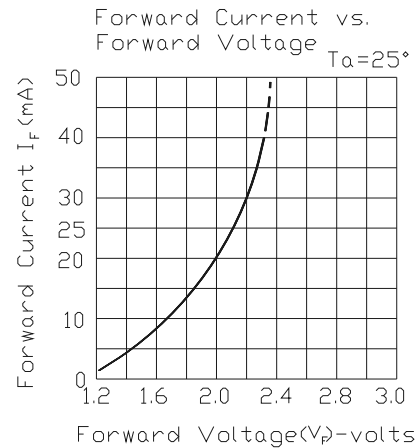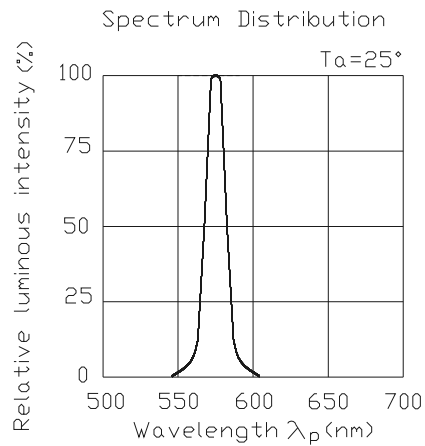



EVERLIGHT ELECTRONICS CO.,LTD.

67-22/R6SG6SC-B11/2T

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank


EVERLIGHT		
CPN: XXXXXX		
P/N: XXXXXX		
		RoHS
XXXXXXXXXXXXXXXXXXXX		
QTY: XXXX		CAT:
		HUE:
LOT NO: XXXXXXXXXXXX		REF:
MADE IN TAIWAN		

Reel Dimensions

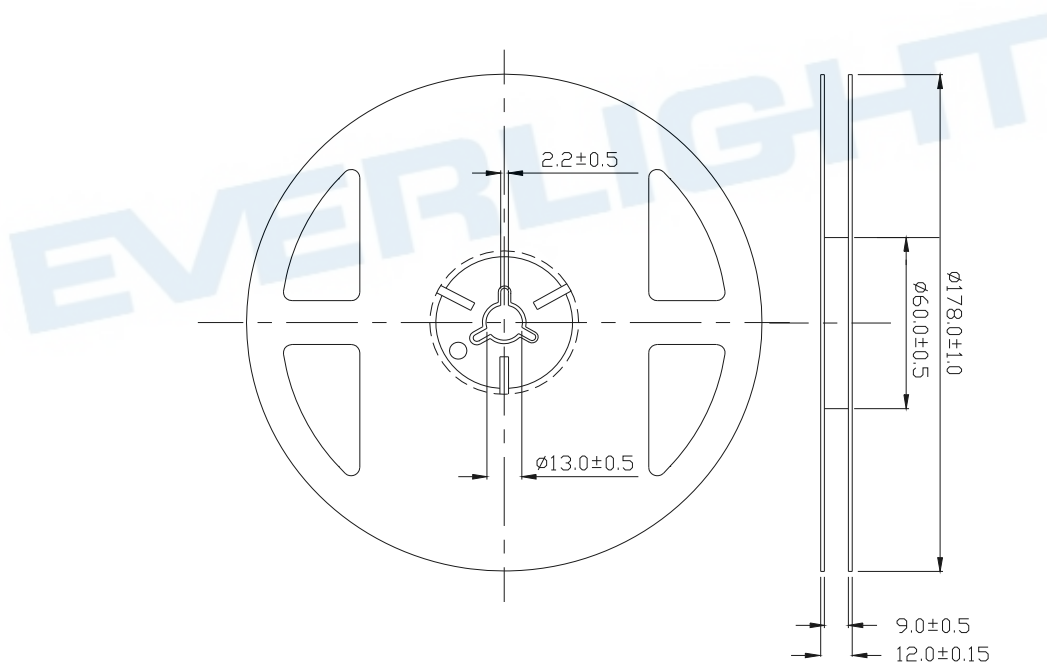


Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$,Unit = mm

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

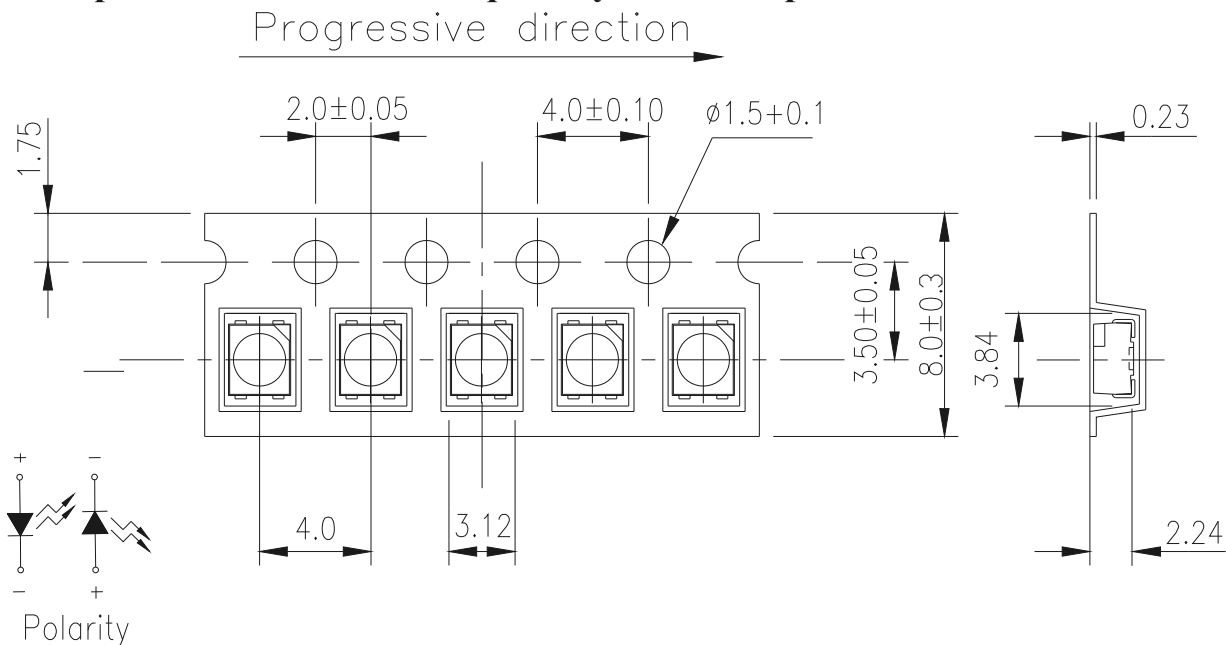

Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$, Unit = mm

Moisture Resistant Packaging

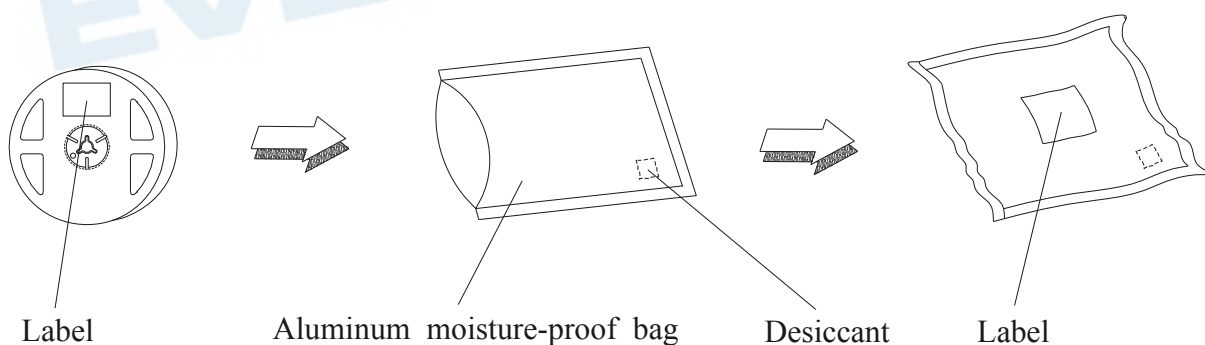

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	I _F = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.

2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less.


If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

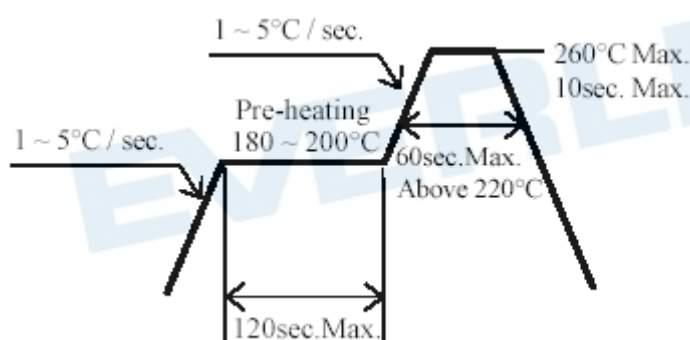

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

67-22/R6SG6SC-B11/2T**5.Repairing**

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

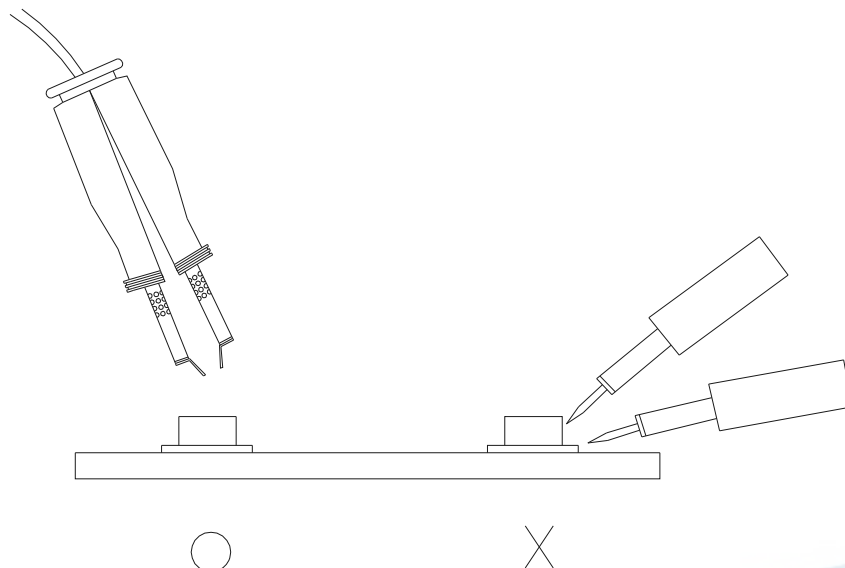**EVERLIGHT ELECTRONICS CO., LTD.**

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>