

Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Features

- P-LCC-4 package
- Optical indicator
- Colorless clear window
- Ideal for backlight and light pipe application
- Inter reflector
- Wide viewing angle
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment
- Available on tape and reel (8mm Tape)
- Pb-free
- The product itself will remain within RoHS compliant version



Descriptions

- The 67-22 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Telecommunication: indicator and backlighting in telephone and fax
- Flat backlight for LCD's, switches and symbols
- Light pipe application
- General use

Device Selection Guide





Chip		Emitted Color	Resin Color
Type	Material		
R6	AlGaInP	Brilliant Red	Water Clear
Y2	AlGaInP	Brilliant Yellow	

Technical Data Sheet



Top View LEDs

67-22/R6Y2C-B31/2T

Package Dimensions

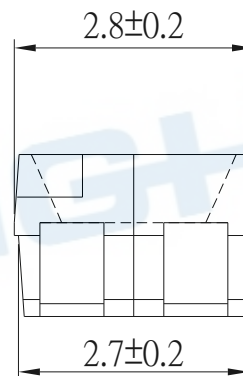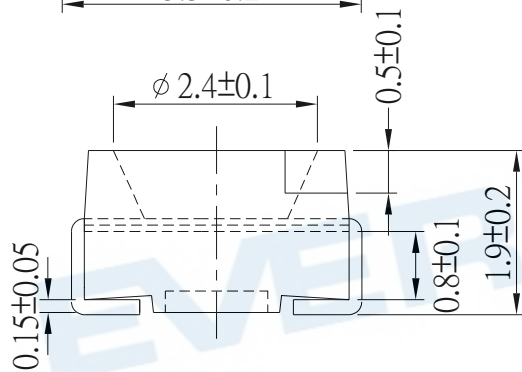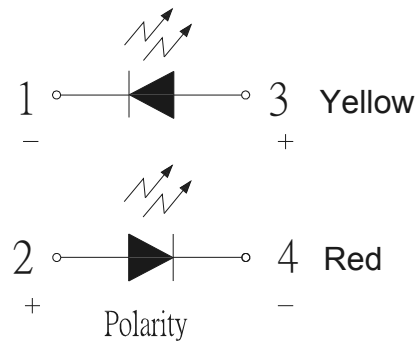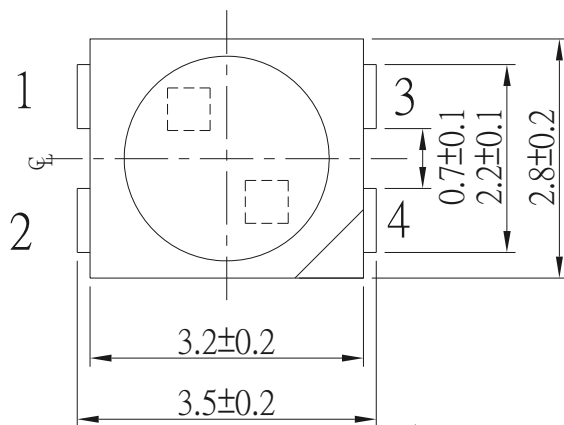

For reflow soldering(propose)

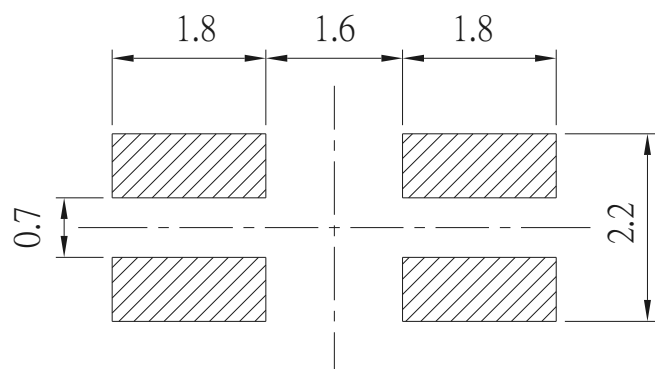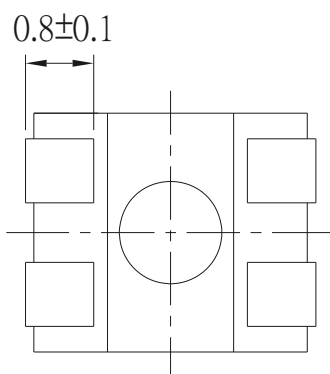

Note: The tolerance unless mentioned is ± 0.1 mm.

Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol		Rating	Unit
Reverse Voltage	V_R		5	V
Forward Current	I_F	R6	25	mA
		Y2	25	
Peak Forward Current(Duty 1/10 @ 1KHz)	I_{FP}	R6	60	mA
		Y2	60	
Power Dissipation	P_d	R6	60	mW
		Y2	60	
Electrostatic Discharge(HBM)	ESD	R6	2000	V
		Y2	2000	
Operating Temperature	Topr		-40 ~ +85	°C
Storage Temperature	Tstg		-40~ +95	°C
Soldering Temperature	Tsol		Reflow soldering : 260 °C for 10 sec. Hand soldering : 350 °C for 3 sec.	

Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol		Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _V	R6	72	-----	285	mcd	I _F =20mA
		Y2		-----			
Viewing Angle	2θ1/2		-----	120	-----	deg	
Peak Wavelength	λ _p	R6	-----	632	-----	nm	
		Y2	-----	591	-----		
Dominant Wavelength	λ _d	R6	621	-----	631	nm	
		Y2	586	-----	594		
Spectrum Radiation Bandwidth	△λ	R6	-----	20	-----	nm	
		Y2	-----	15	-----		
Forward Voltage	V _F	R6	1.75	-----	2.35	V	
		Y2					
Reverse Current	I _R	R6	-----	-----	10	μA	V _R =5V
		Y2					

Notes:

1. Tolerance of Luminous Intensity : ±11%
2. Tolerance of Dominant Wavelength : ±1nm
3. Tolerance of Forward Voltage : ±0.1V

Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Bin Range of Luminous Intensity

Symbol	Bin Code	Min.	Max.	Unit	Condition
R6	Q1	72	90	mcd	$I_F=20\text{mA}$
	Q2	90	112		
	R1	112	140		
	R2	140	180		
	S1	180	225		
	S2	225	285		
Y2	Q1	72	90		
	Q2	90	112		
	R1	112	140		
	R2	140	180		
	S1	180	225		
	S2	225	285		

Bin Range of Dominant Wavelength

Symbol	Bin Code	Min.	Max.	Unit	Condition
R6	FF1	621	626	nm	$I_F=20\text{mA}$
	FF2	626	631		
Y2	DD1	586	588		
	DD2	588	590		
	DD3	590	592		
	DD4	592	594		

Notes:







1. Tolerance of Luminous Intensity : $\pm 11\%$
2. Tolerance of Dominant Wavelength : $\pm 1\text{nm}$

Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Typical Electro-Optical Characteristics Curve (R6)

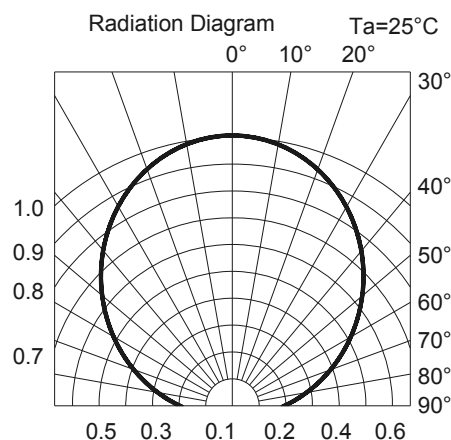
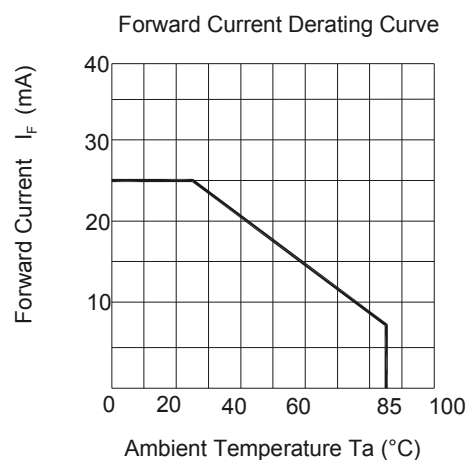
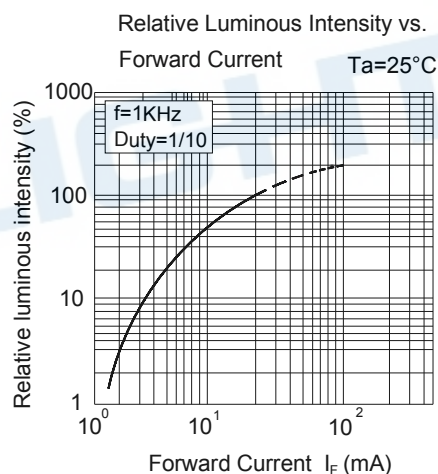
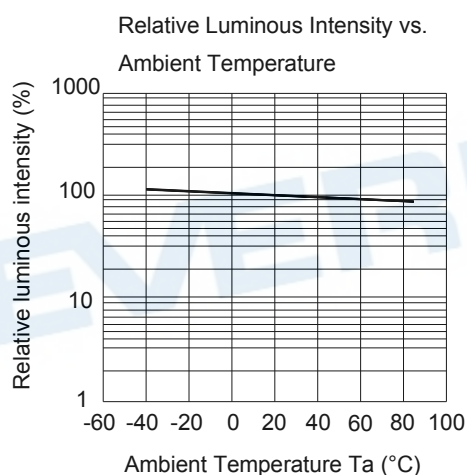
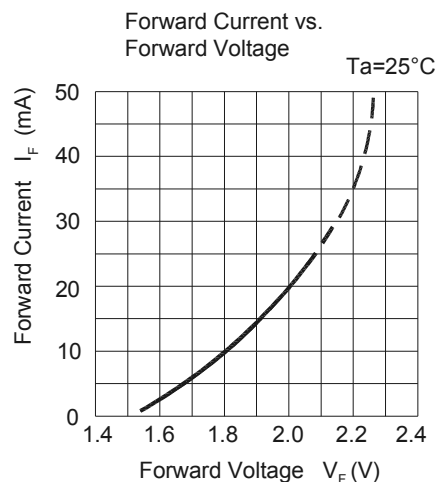
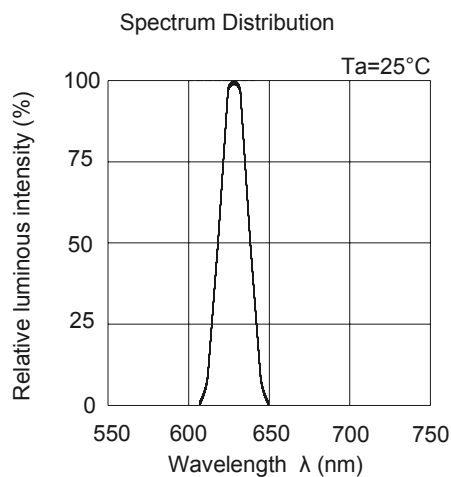


Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Typical Electro-Optical Characteristics Curves (Y2)

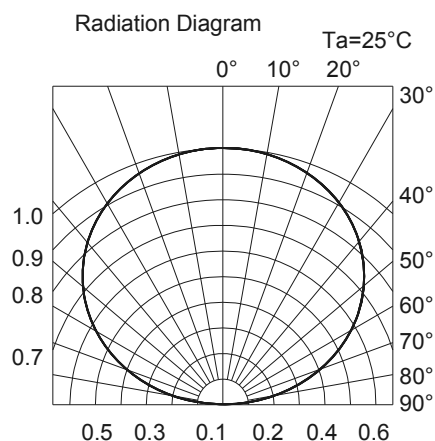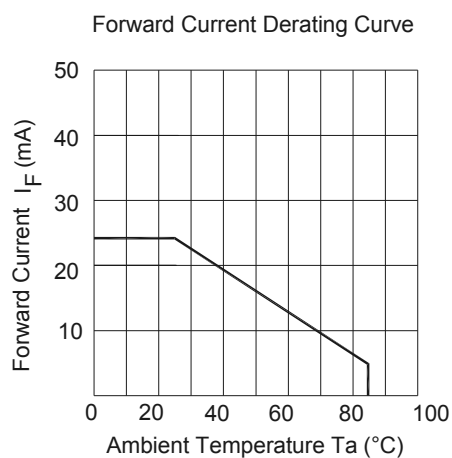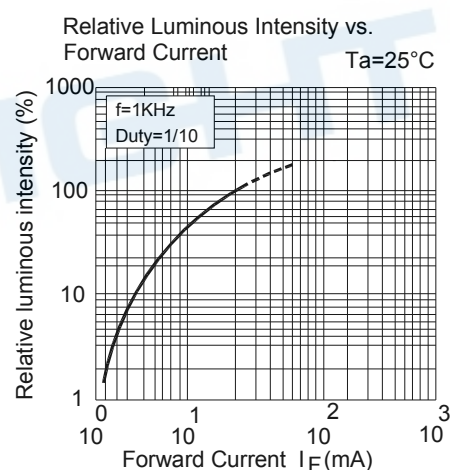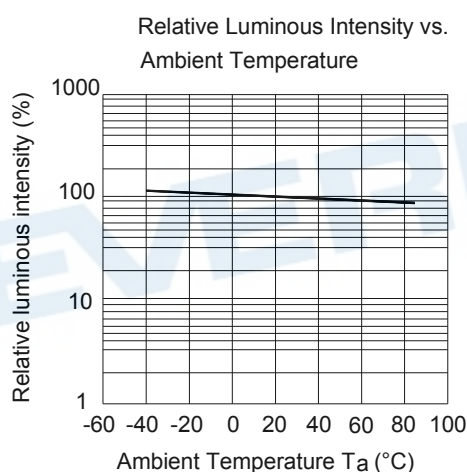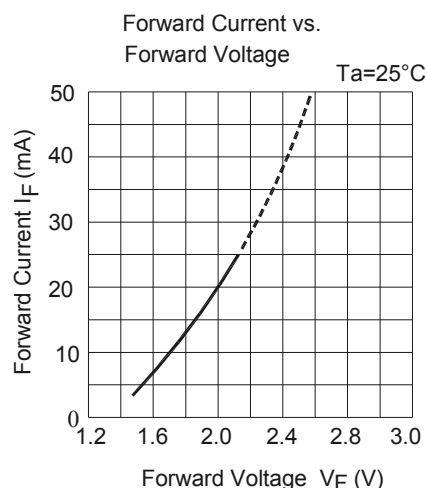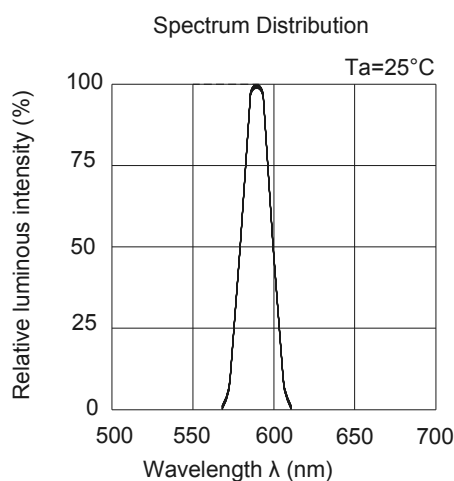



Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Label Explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank

EVERLIGHT		
CPN: XXXXXX		
P/N: XXXXXX		
		RoHS
XXXXXXXXXXXXXXXXXXXX		
QTY: XXXX		
		CAT:
LOT NO: XXXXXXXXXXXX		HUE:
		REF:
MADE IN TAIWAN		

Reel Dimensions

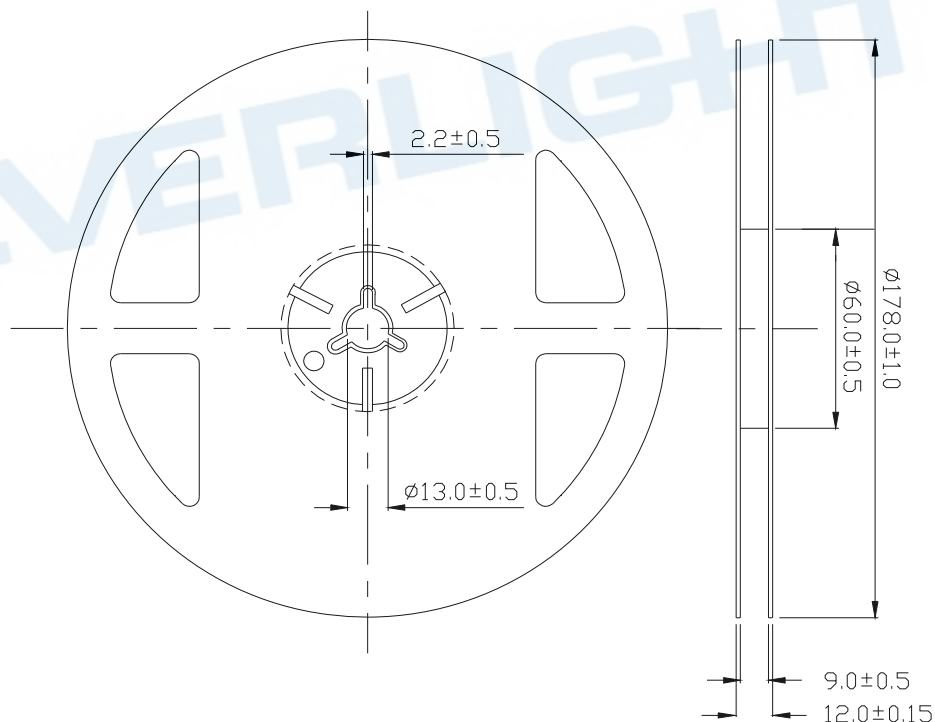


Note: The tolerance unless mentioned is $\pm 0.1\text{mm}$.

Technical Data Sheet

Top View LEDs


67-22/R6Y2C-B31/2T

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel

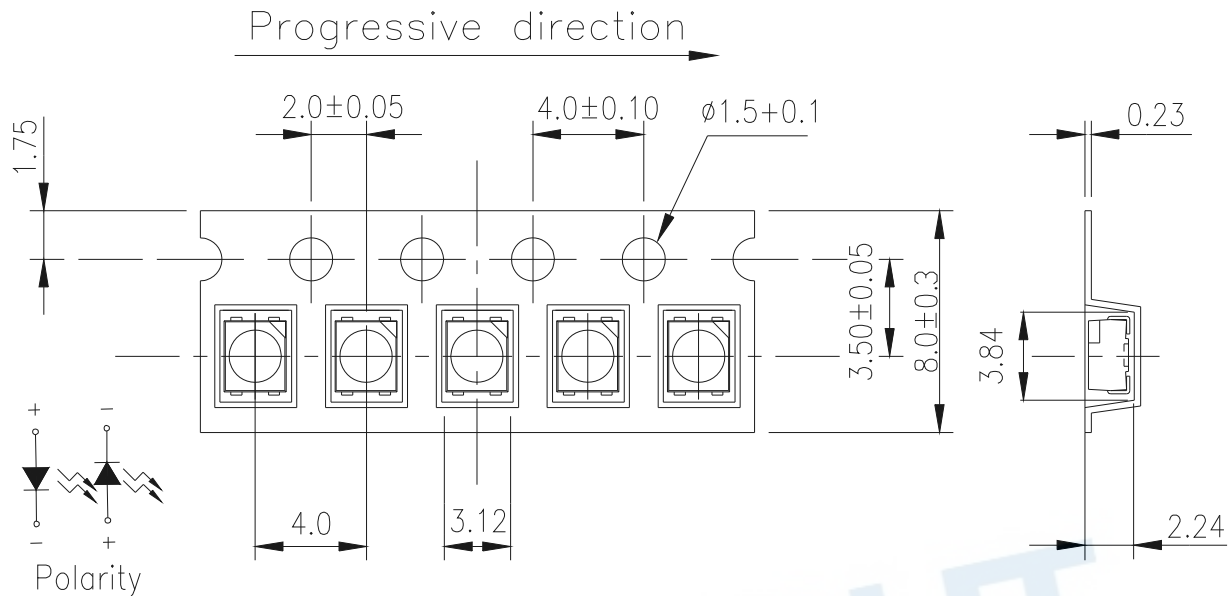

Note: The tolerance unless mentioned is $\pm 0.1\text{mm}$.

Moisture Resistant Packaging

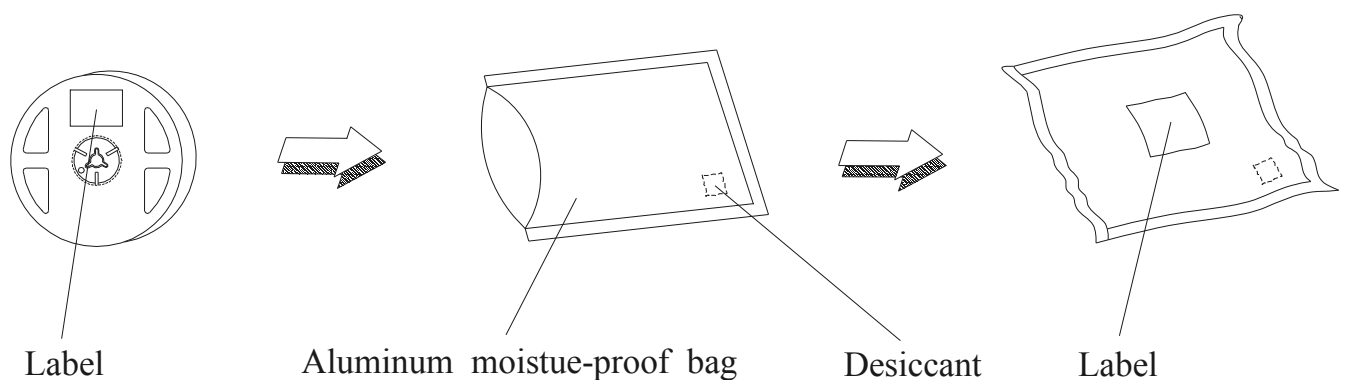

Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 10sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ↓ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min ↓ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	I _F = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH.	1000 Hrs.	22 PCS.	0/1

Technical Data Sheet

Top View LEDs

67-22/R6Y2C-B31/2T

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.

2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less.


If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

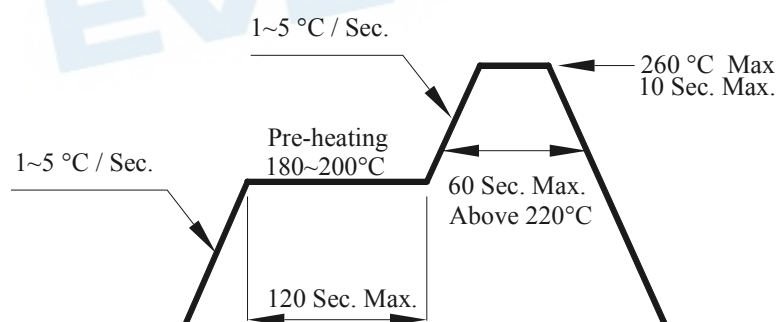

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

Technical Data Sheet

Top View LEDs


67-22/R6Y2C-B31/2T

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

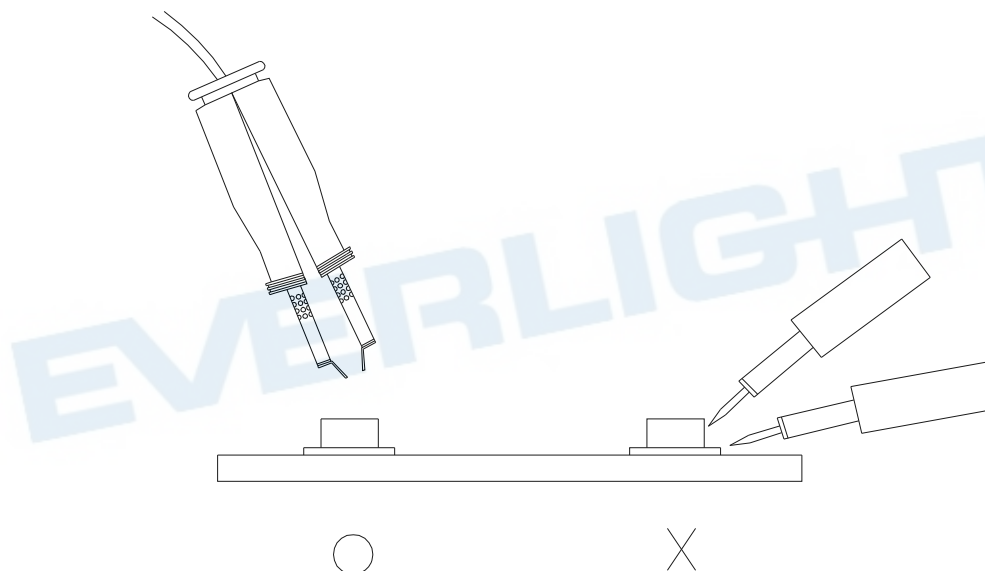

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>