


## DATASHEET

# SMD •B EASR3216RA5



#### Features

- Package in 8mm tape on 7<sup>"</sup> diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

#### Description

• The EASR3216RA5 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.

• Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**

Chip Materials	Emitted Color	Resin Color	
AlGaInP	Brilliant Red	Water Clear	

## Absolute Maximum Ratings (Ta=25°C)

V <sub>R</sub>	5	V
l <sub>F</sub>	25	mA
I <sub>FP</sub>	60	mA
Pd	60	mW
ESD <sub>HBM</sub>	2000	V
T <sub>opr</sub>	-40 ~ +85	°C
Tstg	-40 ~ +90	°C
Tsol	Reflow Soldering : 260 $^\circ C$ for 10 sec. Hand Soldering : 350 $^\circ C$ for 3 sec.	
	I <sub>F</sub> I <sub>FP</sub> Pd ESD <sub>HBM</sub> T <sub>opr</sub> Tstg	I <sub>F</sub> 25   I <sub>FP</sub> 60   Pd 60   ESD <sub>HBM</sub> 2000   T <sub>opr</sub> -40 ~ +85   Tstg -40 ~ +90   Tsol Reflow Soldering : 260 °C for

## Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	450		1420	mcd	_
Viewing Angle	20 <sub>1/2</sub>		30		deg	
Peak Wavelength	λр		632		nm	-
Dominant Wavelength	λd	617.5		633.5	nm	<sup>–</sup> I <sub>F</sub> =20mA -
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm	
Forward Voltage	V <sub>F</sub>	1.75		2.35	V	
Reverse Current	I <sub>R</sub>			10	μA	V <sub>R</sub> =5V
Note: 1.Tolerance of Luminous Intensity: ±11% 2.Tolerance of Dominant Wavelength ±1nm 3.Tolerance of Forward Voltage ±0.1V						

## Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
U1	450	565		
U2	565	715	_	
V1	715	900	mcd	I <sub>F</sub> =20mA
V2	900	1120	_	
W1	1120	1420		

## Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
E4	617.5	621.5		
E5	621.5	625.5		0.00
E6	625.5	629.5	nm	I <sub>F</sub> =20mA
E7	629.5	633.5		

## **Bin Range Of Forward Voltage**

Bin Code	Min.	Max.	Unit	Condition
0	1.75	1.95		
1	1.95	2.15	V	I <sub>F</sub> =20mA
2	2.15	2.35		


Note:


1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3. Tolerance of Forward Voltage ±0.1V

#### **Typical Electro-Optical Characteristics Curves**

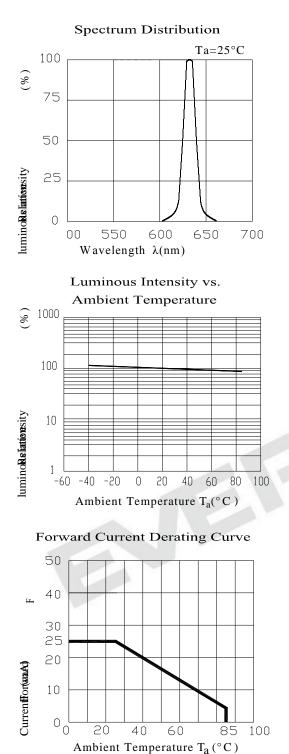


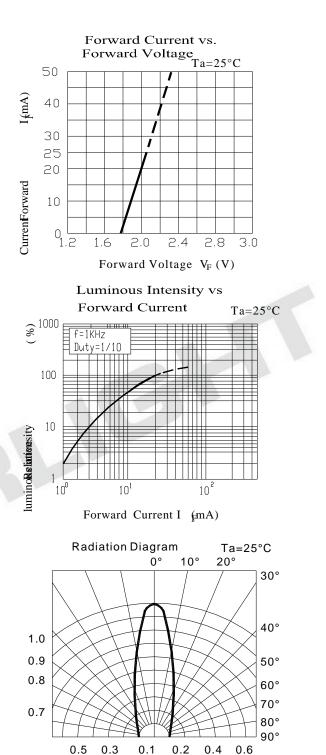

0.1




## **Package Dimension**

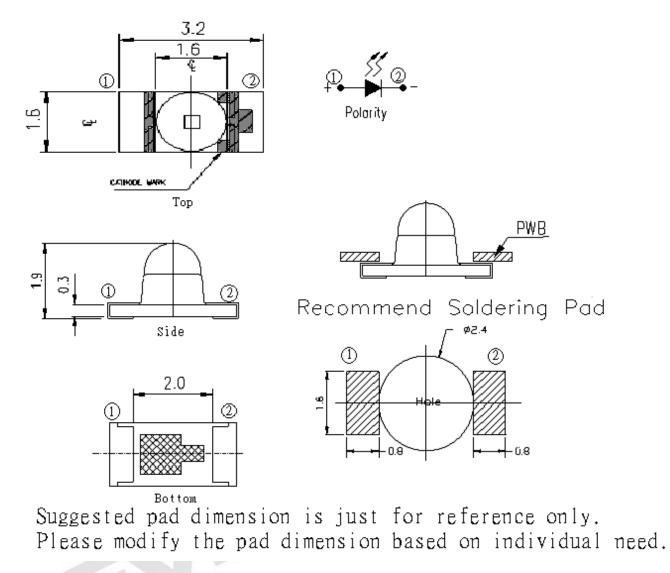

Note: Tolerances unless mentioned ±0.1mm. Unit = mm




#### Label Explanation




- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

#### **Reel Dimensions**

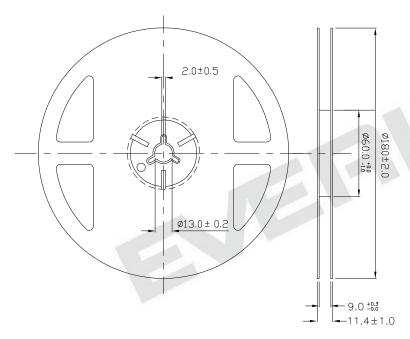


Note: The tolerances unless mentioned is  $\pm 0.1$ mm ,Unit = mm

#### Carrier Tape Dimensions: Loaded quantity 1500 PCS per reel

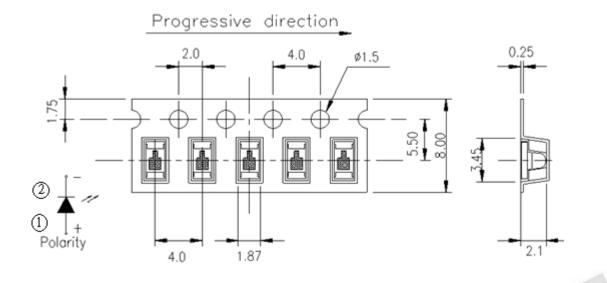


Note: The tolerances unless mentioned is  $\pm 0.1$ mm ,Unit = mm

### **Moisture Resistant Packaging**



Label

[] Aluminum moisture-proof bag



Label



#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big

current change ( Burn out will happen ).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.

2.3 After opening the package: The LED's floor life is 1 year under  $30^{\circ}$ C or less and 60% RH or less.


If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60 \pm 5^{\circ}$ C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

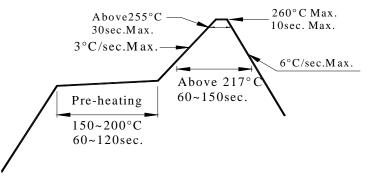

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





#### **Application Restrictions**

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.