EVERLIGHT

DATASHEET

SMD • Side LEDs 57-21/T2C-UV2W1M/BF



Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).
- Precondition: Bases on JEDEC J-STD 020D Level 3

Description

• The white LED which was fabricated using a blue LED and a phosphor, and the phosphor is excited by blue light and emits yellow fluorescence.

The mixture of blue light and yellow light results in a white emission.

Applications

- OA equipment
- Backlighting of full color LCD
- Automotive equipment
- Replacement of conventional light bulbs and Fluorescent Lamps

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
InGaN	White	Yellowish

Absolute Maximum Ratings (Ta=25 $^{\circ}\!\!\!\mathrm{C}$)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	lF	30	mA	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA	
Power Dissipation	Pd	110	mW	
Junction Temperature	Tj	115	°C	
Operating Temperature	T _{opr}	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
ESD	ESDHBM	1000	V	
Soldering Temperature	T _{sol}	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.		
EV				

Electro-Optical Characteristics (Ta=25℃)


Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	900		1800	mcd	I⊧=20mA
Viewing Angle	20 _{1/2}		120		deg	I⊧=20mA
Spectrum Radiation Bandwidth	Δλ		18		nm	I⊧=20mA
Forward Voltage	VF	2.75		3.95	V	I⊧=20mA
Reverse Current	IR			10	μA	V _R =5V

Note:

1. Tolerance of Luminous Intensity: ±11%

2. Tolerance of Forward Voltage: ±0.1V

3. Tolerance of Chromaticity Coordinates: ±0.01



Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
V2	900	1120		
W1	1120	1420	mcd	I _F =20mA
W2	1420	1800		

Note:

Tolerance of Luminous Intensity: ±11%

Bin Range of Dominant Wavelength

Group	Bin Code	Min.	Max.	Unit	Condition
М	5	2.75	3.05		
	6	3.05	3.35		
	7	3.35	3.65	nm	I _F =20mA
	8	3.65	3.95		


Note:

Bin Range of Chromaticity Coordinates


Group	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
	52	0.287	0.295	B6	0.311	0.294
		0.283	0.305		0.307	0.315
	B3	0.304	0.330		0.330	0.339
		0.307	0.315		0.330	0.318
		0.307	0.315	C0	0.330	0.318
	D4	0.304	0.330		0.330	0.360
U	B4	0.330	0.360		0.361	0.385
		0.330	0.339		0.356	0.351
		0.296	0.276			
	B5	0.287	0.295			
		0.307	0.315			
		0.311	0.294			


Note: Tolerance of Chromaticity Coordinates: ±0.01

The C.I.E. 1931 chromaticity diagram.

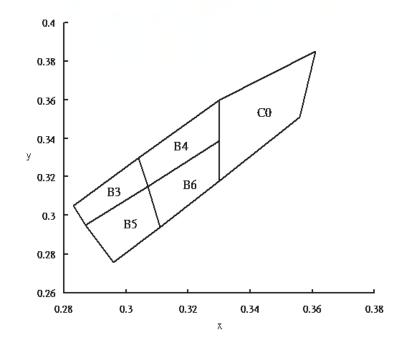


EVERLIGHT










Ambient Temperature Ta (°C)

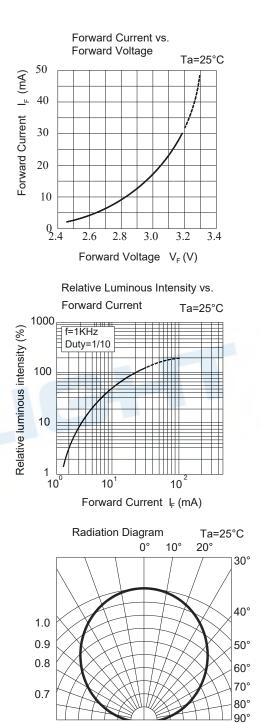

0.5 0.3

0.1


0.2

0.4 0.6

2,38


3,4

Package Dimension







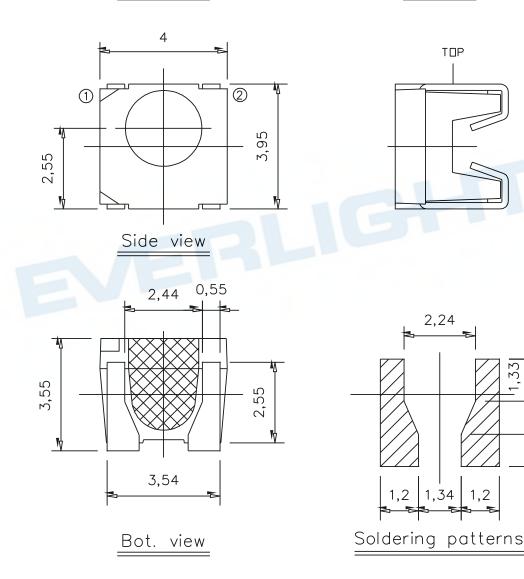


Note: Tolerances unless mentioned ±0.1mm. Unit = mm


7

Moisture Resistant Packing Materials

Label Explanation

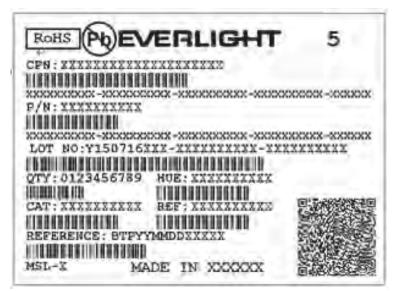


- CPN: Customer's Product Number
- P/N: Product Number
- · QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- · LOT No: Lot Number

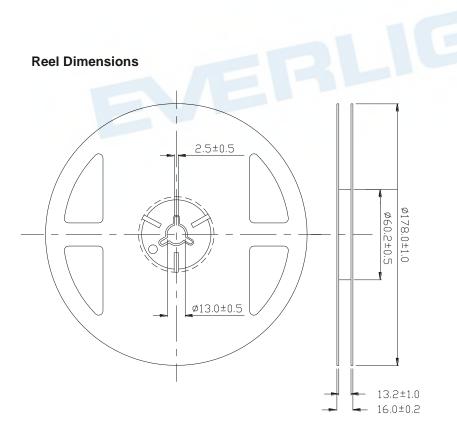



Carrier Tape Dimensions: Loaded Quantity 500 pcs. Per Reel

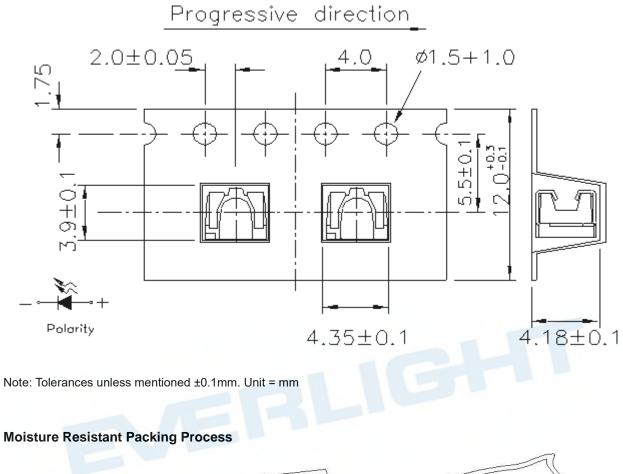




Note: Tolerances unless mentioned ±0.1mm. Unit = mm



Precautions for Use

1. Over-current-proof

1.1 Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

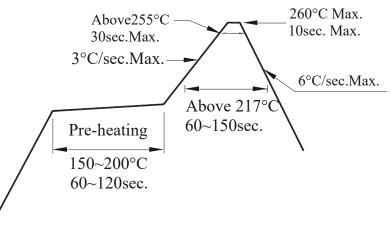

2. Storage

- 2.1 Moisture proof bag should only be opened immediately prior to usage.
- 2.2 Environment should be less than 30 $^\circ\!\!\mathbb{C}$ and 60% RH when moisture proof bag is opened.
- 2.3 After opening the package MSL Conditions stated on page 1 of this spec should not be exceeded.
- 2.4 If the moisture sensitivity card indicates higher than acceptable moisture, the component should be baked at min. 60deg +/-5deg for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile
 - 3.2 Reflow soldering should not be done more than two times.
 - 3.3 When soldering, do not put stress on the LEDs during heating.
 - 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

DISCLAIMER

- 1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
- 2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
- 3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
- 4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
- 6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.