
# 

# DATASHEET

# SMD B EAST1916RYA0



## Features

- Package in 8mm tape on 7'' diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

# Description

- The SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

## **Applications**

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

## **Device Selection Guide**

Code	Chip Materials	Emitted Color	Resin Color	
SUR	AlGaInP	Brilliant Red	Water Clear	
UY	AlGaInP	Brilliant Yellow		

# Absolute Maximum Ratings (Ta=25℃)


Parameter	Symbol	Code	Rating	Unit
Reverse Voltage	V <sub>R</sub>		5	V
Ferrierd Current		SUR	25	
Forward Current	I <sub>F</sub>	UY	25	mA
Peak Forward Current		SUR	60	~
(Duty 1/10 @1KHz)	I <sub>FP</sub>	UY	60	mA
Dewer Discinction		SUR	60	
Power Dissipation	Pd	UY	60	mW
Electrostatic Discharge	ESD <sub>HBM</sub>	SUR	2000	V
Electrostatic Discharge		UY	2000	V
Operating Temperature	T <sub>opr</sub>		-40 ~ +85	°C
Storage Temperature	Tstg		-40 ~ +90	°C
	Tsol		Reflow Soldering : 260 $^\circ\!\!\mathbb{C}$ for 10 sec.	
Soldering Temperature			Hand Soldering : 350 $^\circ\!\mathrm{C}$ for 3 sec.	

# Electro-Optical Characteristics (Ta=25°C)


Parameter	Symbol	Code	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	SUR	16	39		– mcd	- - I <sub>F</sub> =20mA -
		UY	16	40		nicu	
Viewing Angle	<b>2</b> θ <sub>1/2</sub>			130		deg	
Peak Wavelength	λр	SUR		632		- nm	
		UY		591			
Dominant Wavelength	λd	SUR		624		- nm	
		UY		589			
Spectrum Radiation Bandwidth	Δλ	SUR		20		- nm	
		UY		15			
Forward Voltage	V <sub>F</sub>	SUR	1.7	2.0	2.4	- V	
		UY	1.7	2.0	2.4		
Reverse Current	I <sub>R</sub>	SUR			10	– μΑ	V <sub>R</sub> =5V
		UY			10		


#### DATASHEET SMD • B EAST1916RYA0

# Typical Electro-Optical Characteristics Curves SUR

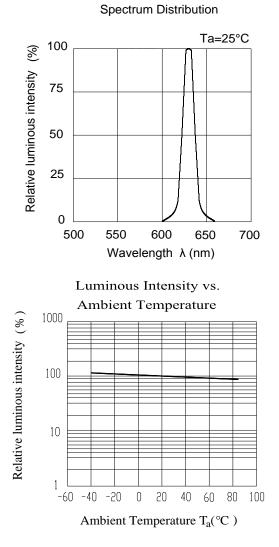


Forward Current Derating Curve




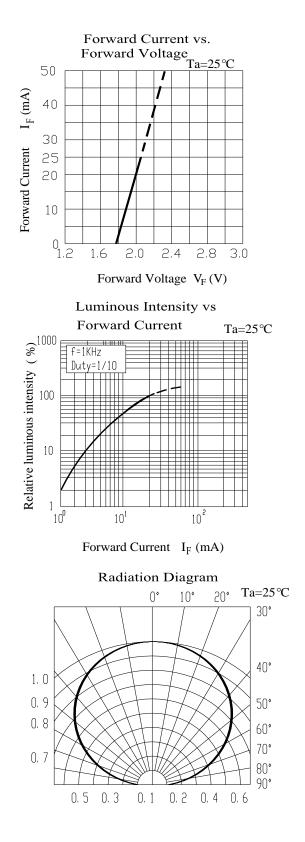


# **Typical Electro-Optical Characteristics Curves** UY









Forward Current Derating Curve



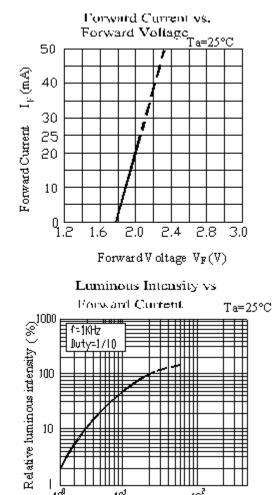



ForwardCurrent IF (mA)


П Ш

10

់លើ

10'

# **Package Outline Dimensions**

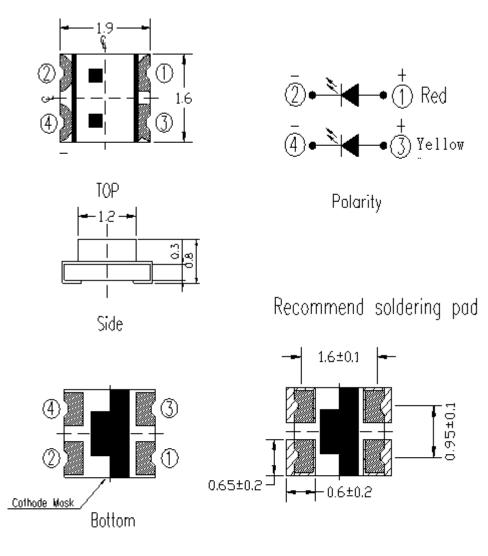


Suggested pad dimension is just for reference only. Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned  $\pm 0.1$  mm. Unit = mm



## Label Explanation




### P/N: Product Number

CPN: Customer's Product Number

- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number


## **Reel Dimensions**

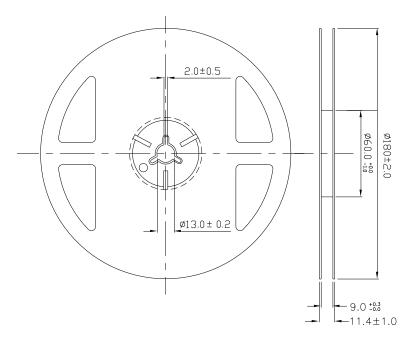

Note: The tolerances unless mentioned is  $\pm 0.1$ mm ,Unit = mm




# Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

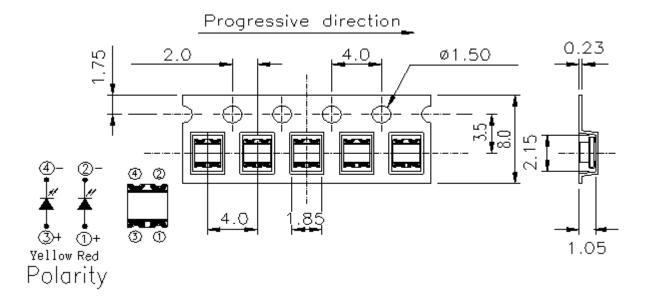

Note: The tolerances unless mentioned is  $\pm 0.1$  mm ,Unit = mm

# **Moisture Resistant Packaging**

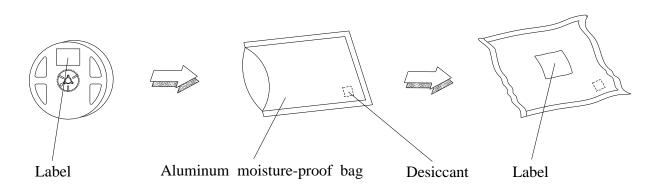




# **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 After opening the package: The LEDs should be kept at  $30^\circ$ C or less and 60%RH or less.
- 2.3 The LEDs should be used within 168 hours (7days) after opening the package .
- If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

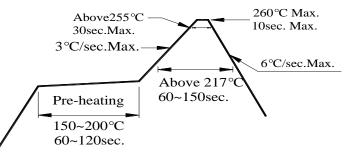

3.2 Reflow soldering should not be done more than two times.


- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





# **Application Restrictions**

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact everlightamericas before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.