


DATASHEET

SMD • B EASV1706GA2



Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

The EASV1706GA2 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and smaller equipment to be obtained. Lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
AlGaInP	Brilliant Yellow Green	Water Clear

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V _R	5	V	
Forward Current	I _F	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	60	mA	
Power Dissipation	Pd	60	mW	
Electrostatic Discharge	ESD _{HBM}	2000	V	
Operating Temperature	T _{opr}	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
Soldering Temperature	Tsol	Reflow Soldering : 260 $^\circ\!{\rm C}$ for 10 sec. Hand Soldering : 350 $^\circ\!{\rm C}$ for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	45		90	mcd	_
Viewing Angle	20 _{1/2}		130		deg	
Peak Wavelength	λp		575		nm	
Dominant Wavelength	λd	570.0		576.0	nm	[–] I _F =20mA
Spectrum Radiation Bandwidth	$\Delta \lambda$		20		nm	
Forward Voltage	V _F	1.70		2.30	V	
Reverse Current	I _R			10	μΑ	V _R =5V

Note:

1. Tolerance of Luminous Intensity: ±11%

2. Tolerance of Dominant Wavelength ±1nm

3. Tolerance of Forward Voltage: ±0.05V

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
P1	45	57		
P2	57	72	mcd	I _F =20mA
Q1	72	90		

Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
CC2	570.0	571.5		
CC3	571.5	573.0	nm	L = 20m A
CC4	573.0	574.5	nm	I _F =20mA
CC5	574.5	576.0		

Bin Range Of Forward Voltage

Bin Code	Min.	Max.	Unit	Condition
19	1.70	1.80		
20	1.80	1.90		
21	1.90	2.00	—— V	I _F =20mA
22	2.00	2.10	v	I _F –2011A
23	2.10	2.20		
24	2.20	2.30		

Note:


1.Tolerance of Luminous Intensity: ±11%


2.Tolerance of Dominant Wavelength ±1nm

3. Tolerance of Forward Voltage: ±0.05V






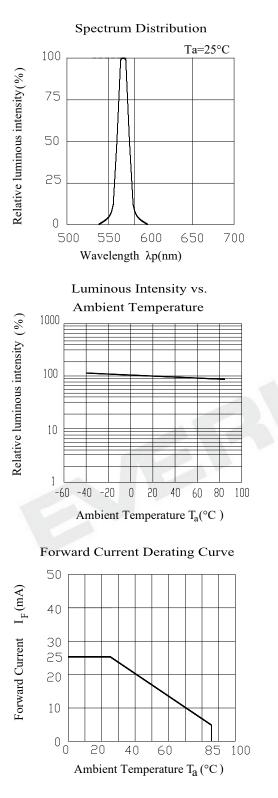

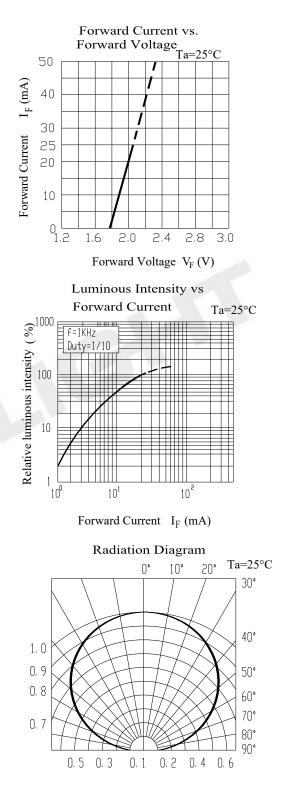


Package Dimension

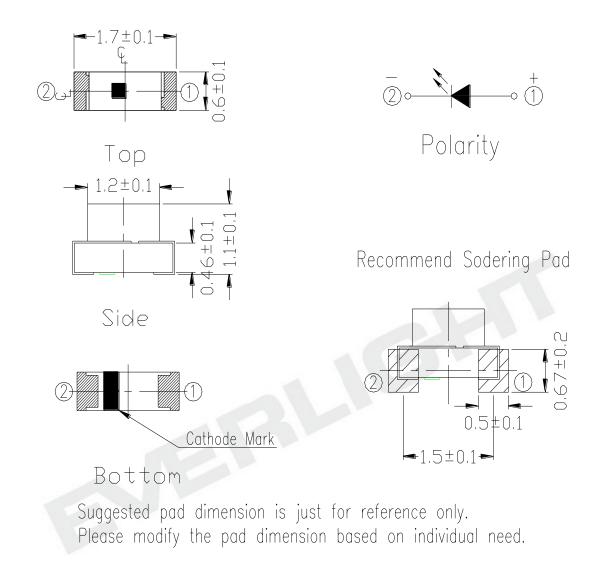

Note: Tolerances unless mentioned ±0.1mm. Unit = mm




Moisture Resistant Packing Materials Label Explanation



CPN: Customer's Product Number


- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- · LOT No: Lot Number

Reel Dimensions

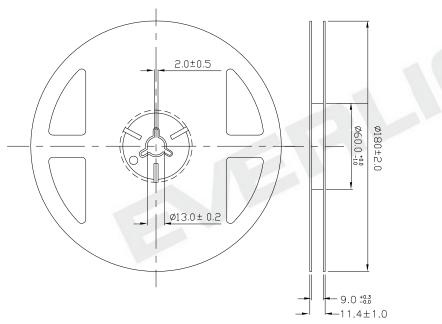


Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm


Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

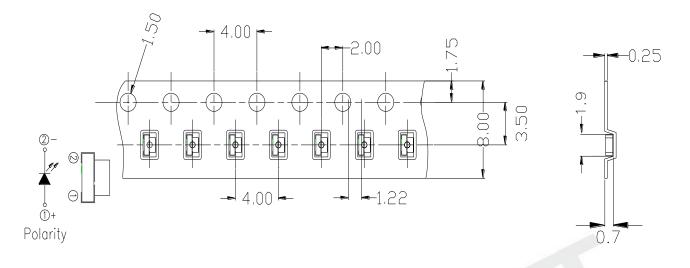



Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging









Aluminum moisture-proof bag




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 The LEDs should be used within 168 hours (7days) after opening the package . If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 60+5°C for 24 hours
- 3. Soldering Condition
- 3.1 Pb-free solder ter

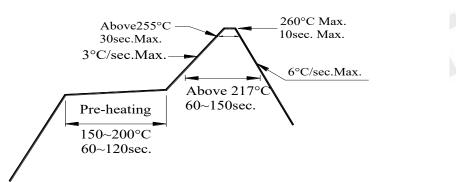

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

DISCLAIMER

- 1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
- 2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
- 3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
- 4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
- 6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.